


CLAUSTRA SINGLE PANEL

Technical drawing CS-A



TUBULAR SYSTEM: DETAILS AND FINISHES

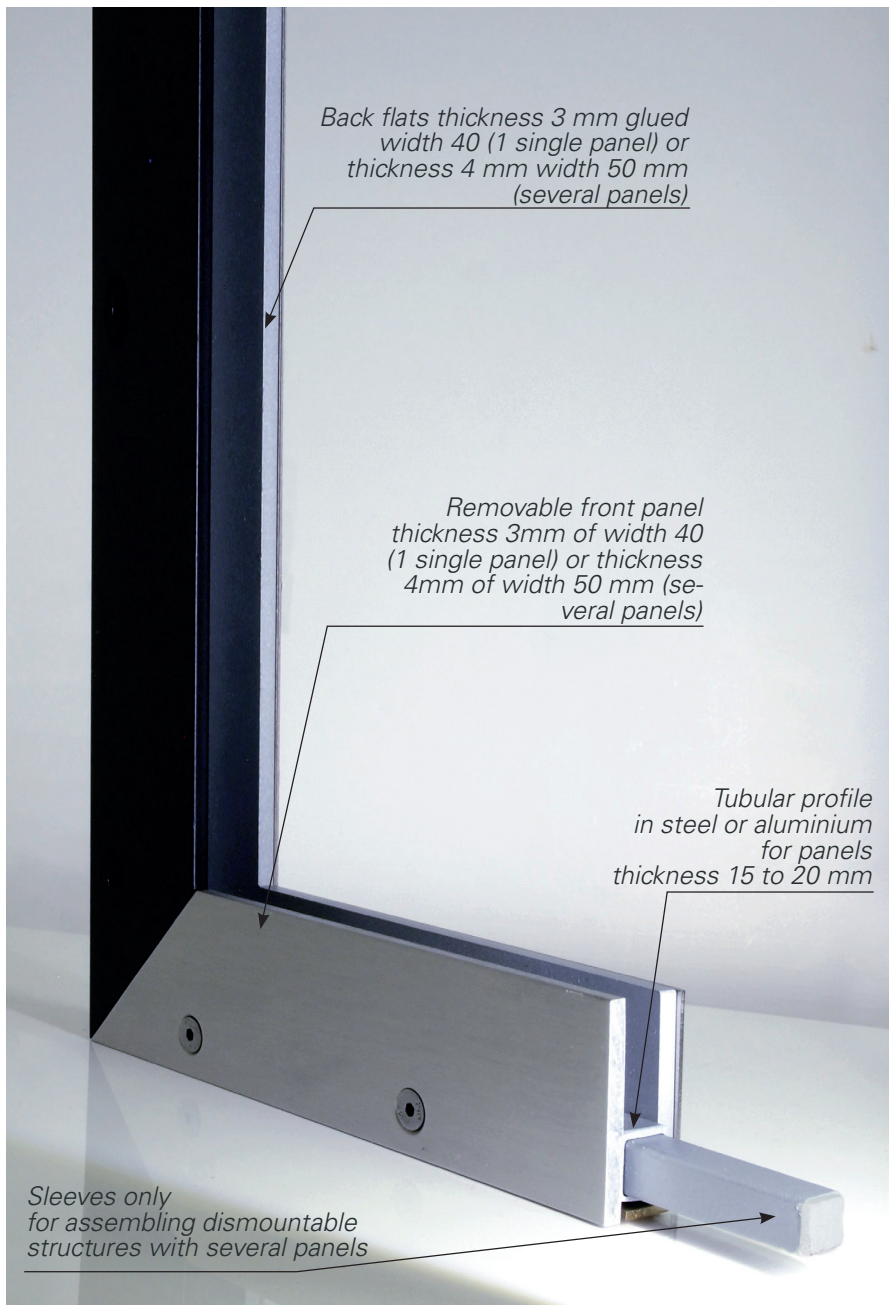

Dimensions

• Square tubular structure in steel

for Dacryl® 15 mm thick:
16 × 16 mm

for Dacryl® th. 18 and 20 mm :
20 × 20 mm

• Square tubular structure aluminium (wet rooms) 20 × 20 mm only

• Closing dishes

width 40 mm / thickness 3 mm :
1 panel


width 50 mm / thickness 4 mm:
several panels

• Finishing plates 2 mm thick (optional)


width 40 mm : 1 panel

width 50 mm : several panels


Frame finishes




Anodized aluminum




Black RAL 9005
Textured



Gold RAL 1036
Textured



White
RAL 9010 textured




Grey RAL 9006
Textured

Other finishes on quotations


TUBULAR SYSTEM: DETAILS AND FINISHES



Finishing dishes (optional)




Anodized aluminum




Black RAL 9005
Textured




Stainless steel
Mirror polished



Brass
Polished




Brushed aluminium




White
RAL 9010 textured




Stainless steel
Brushed



Brass
Brushed



Gold RAL 1036
Textured



Grey RAL 9006
Textured

CLAUSTRA: SINGLE PANEL

Technical drawing ref. CS-A



Uses

- Partition wall straight / verse
- Impost

Fixations

- Floor - ceiling
- Floor - wall

Dimensions

- Square tubular structure in steel

for Dacryl® 15 mm thick:

16 × 16 mm

for Dacryl® th. 18 and 20 mm :

20 × 20 mm

- Square tubular structure aluminium (wet rooms)

20 × 20 mm only

- Closing dishes

width 40 mm / thickness 3 mm

- Finishing plates 2 mm thick (optional) width 40 mm

- Mounting frame

30 × 30 mm thick 2

Deliverables

Delivered assembled:

- Dacryl® panel inserted in tubular frame for transport and installation
- LED lighting with soldered wire outlet, ready to connect
- Power supply 220 V for 12v led lighting
- Optional finishing dishes delivered separately, ready to glue (glue supplied)

CLAUSTRA: SINGLE PANEL


Technical drawing ref. CS-A

Description of deliverables

Dacryl® panel delivered in the frame for transport and to be removed for installation of the frame.

Prepared led ribbon lighting with wire exit welded / delivered ready-to-connect

Optional finishing dishes straight cuts to be glued : glue supplied

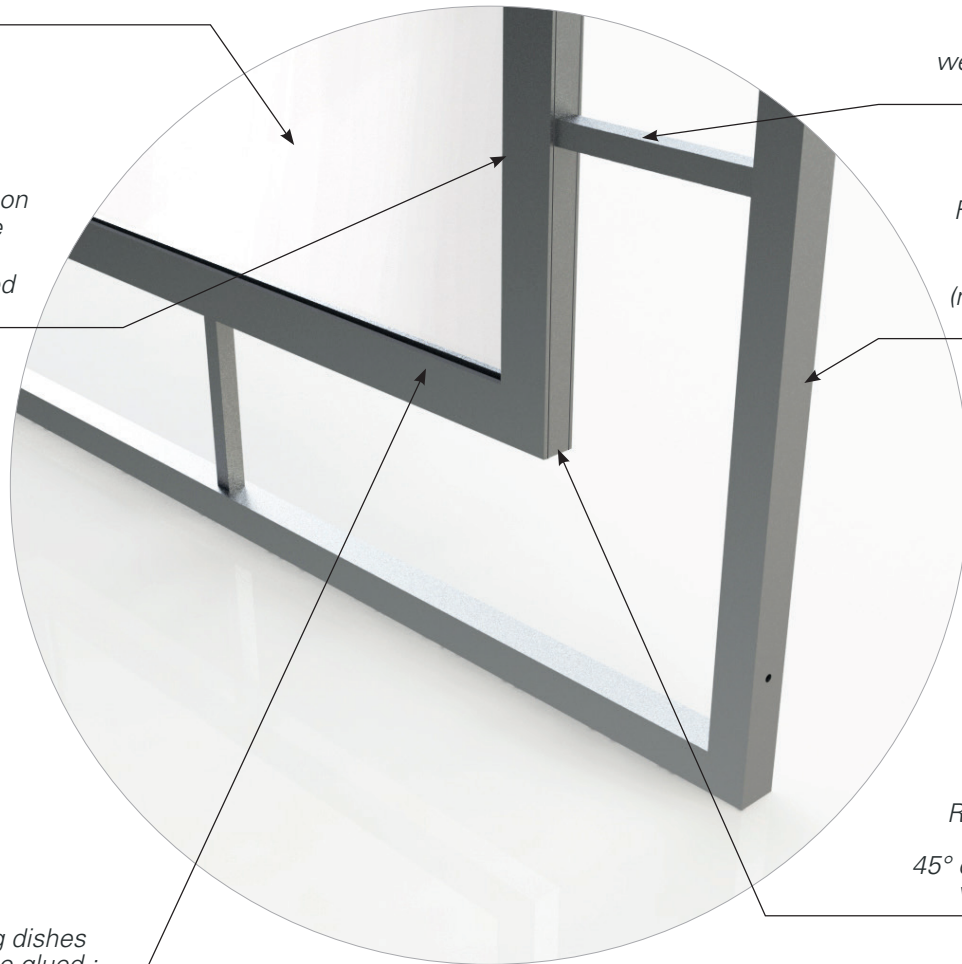


Tubular frame welded on external mounting frame

Frame to be fixed mechanically floor/wall/ceiling (mounting screws not included)

Removable dishes front panel 45° cuts 3 mm thick : width 40 -1 panel

CLAUSTRA: SINGLE PANEL DECLINATION

Technical drawing ref. CS-A

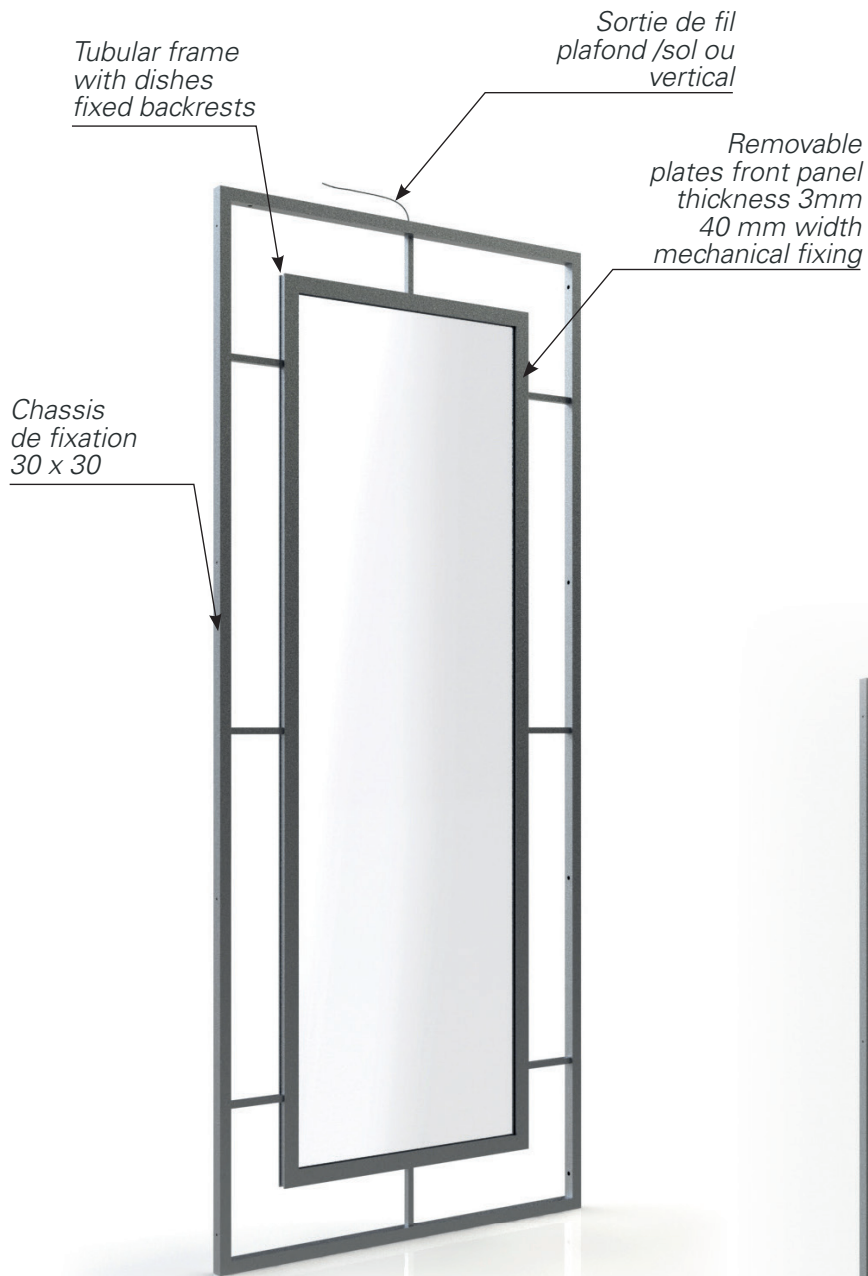

① Single panel - ref CS-A




② Double panels - ref CS-A2

CLAUSTRA: SINGLE PANEL

Technical drawing ref. CS-A

General informations

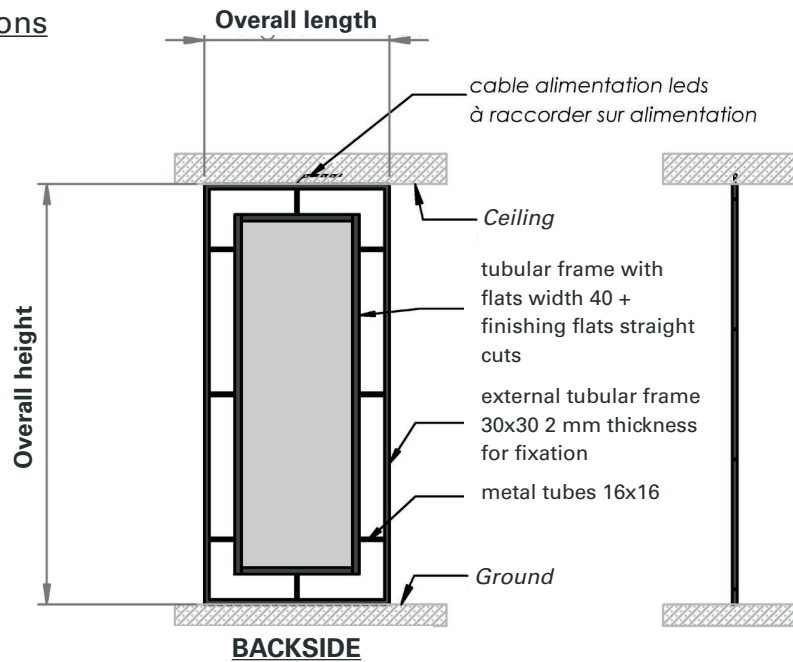

Technical plan product description

