


CURVED TUBULAR FRAME SINGLE PANEL

Technical drawing C-B



TUBULAR SYSTEM: DETAILS AND FINISHES

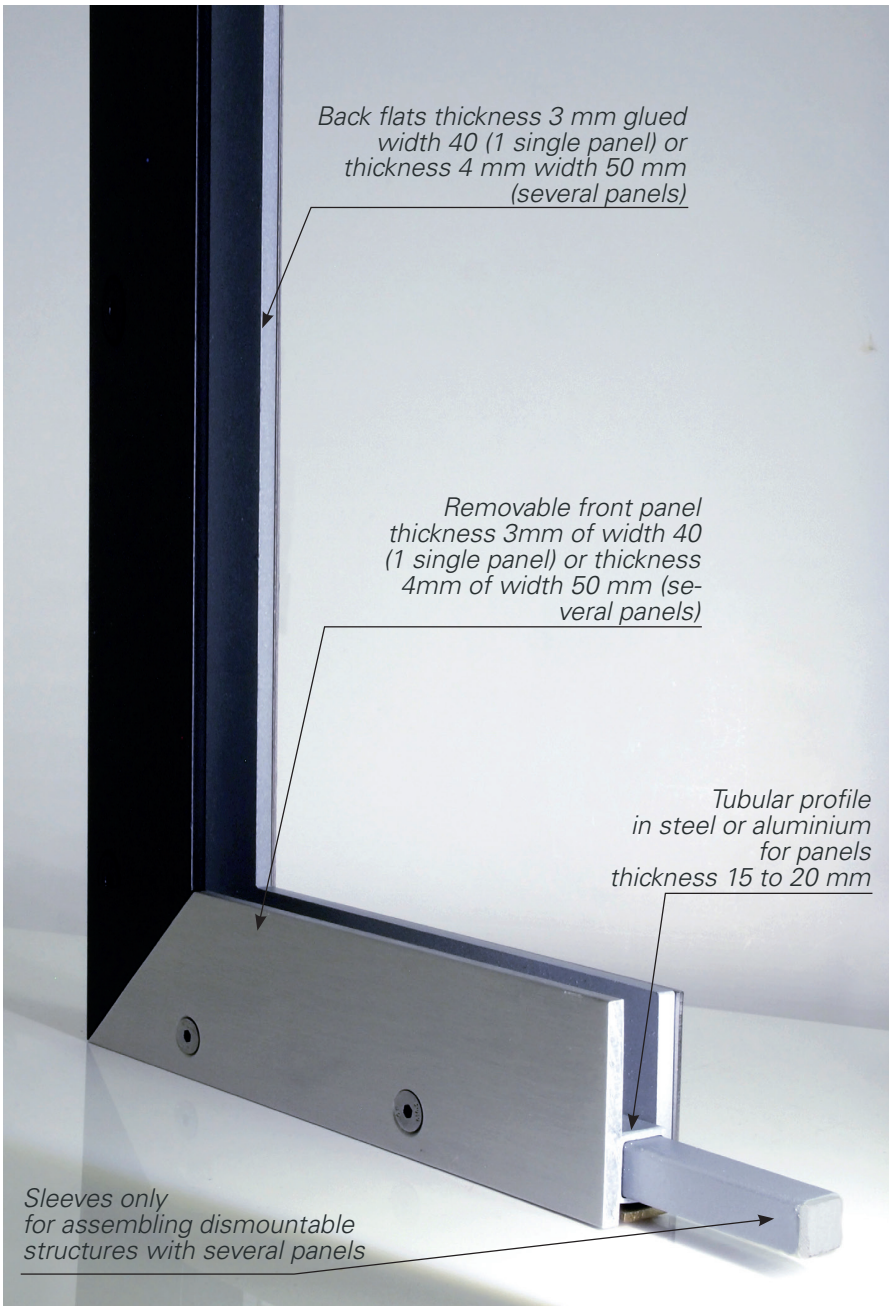

Dimensions

• Square tubular structure in steel

for Dacryl® 15 mm thick:
16 × 16 mm


for Dacryl® th. 18 and 20 mm :
20 × 20 mm

• Square tubular structure aluminium (wet rooms)
20 × 20 mm only


• Closing dishes
width 40 mm / thickness 3 mm :
1 panel
width 50 mm / thickness 4 mm:
several panels

• Finishing plates 2 mm thick (optional)
width 40 mm : 1 panel
width 50 mm : several panels

Frame finishes




Anodized aluminum




Black RAL 9005
Textured



Gold RAL 1036
Textured



White
RAL 9010 textured




Grey RAL 9006
Textured

Other finishes on quotations


TUBULAR SYSTEM: DETAILS AND FINISHES



Finishing dishes (optional)




Anodized aluminum




Black RAL 9005 Textured




Stainless steel Mirror polished



Brass Polished




Brushed aluminium



White RAL 9010 textured




Stainless steel Brushed



Brass Brushed



Gold RAL 1036 Textured



Grey RAL 9006 Textured

CURVED TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-B



Uses

- Partition wall straight / verse
- Impost
- Wall separation

Bindings

- Floor - ceiling
- Floor - wall

Dimensions

- Square tubular structure in steel

for Dacryl® 15 mm thick:

16 × 16 mm

for Dacryl® th. 18 and 20 mm :

20 × 20 mm

- Square tubular structure aluminium (wet rooms)

20 × 20 mm only

- Closing dishes

width 40 mm / thickness 3 mm

- Finishing plates 2 mm thick (optional) width 40 mm

Deliverables

Delivered pre-assembled:

- Dacryl® panel inserted in tubular frame for transport and installation
- Led lighting with welded wire outlet, in roll ready to lay and connect
- Power supply 220 V for 12v led lighting
- Optional finishing flats delivered separately, ready to be glued (glue supplied) and mechanically fixed for curves (screws supplied)

CURVED TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-B

Description of deliverables


Dacryl® panel delivered in the frame for transport and to be removed for installation of the frame.

Tubular frame to be fixed mechanically floor wall/ceiling (fixing screws not provided)

Prepared led ribbon lighting with wire exit welded / delivered in rolls ready to install and connect


Removable dishes front panel 45° cuts 3 mm thick width 40 Mechanical fixing

Optional finishing dishes straight cuts to be glued (glue supplied) and mechanically fastened for curves (screws supplied)

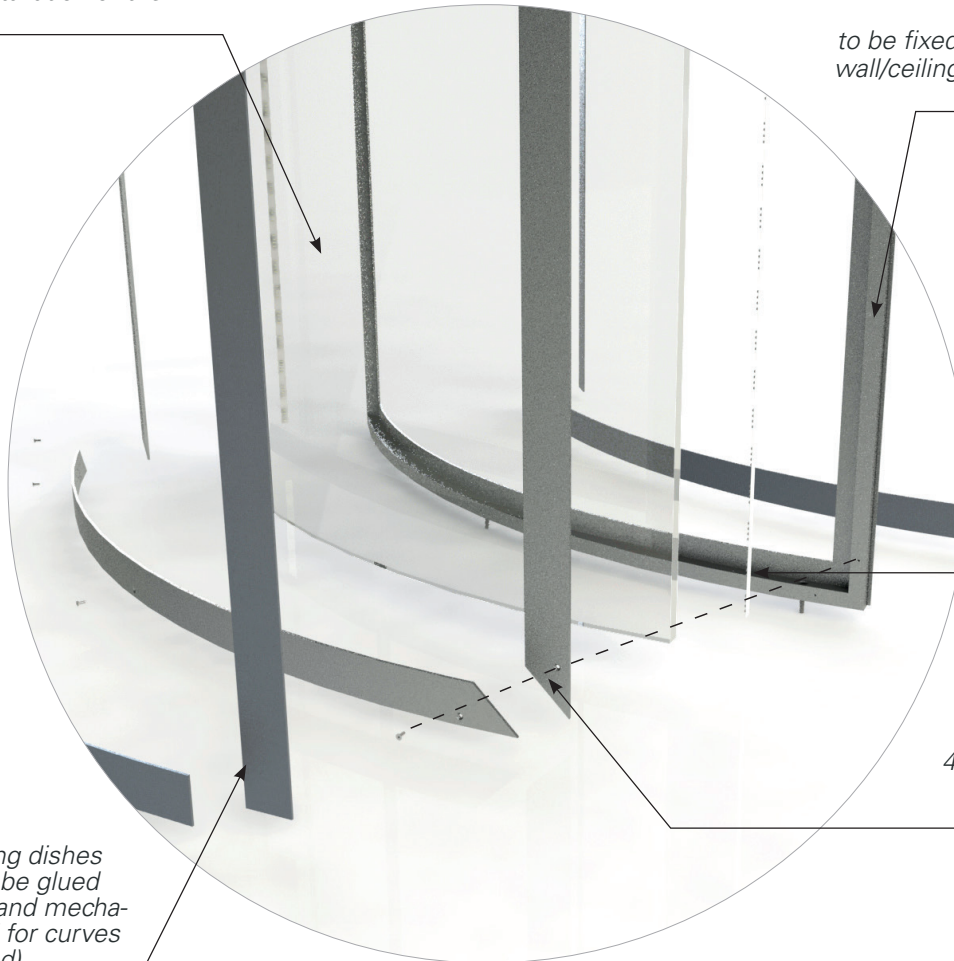

CURVED TUBULAR FRAME: SINGLE PANEL


Technical drawing ref. C-B

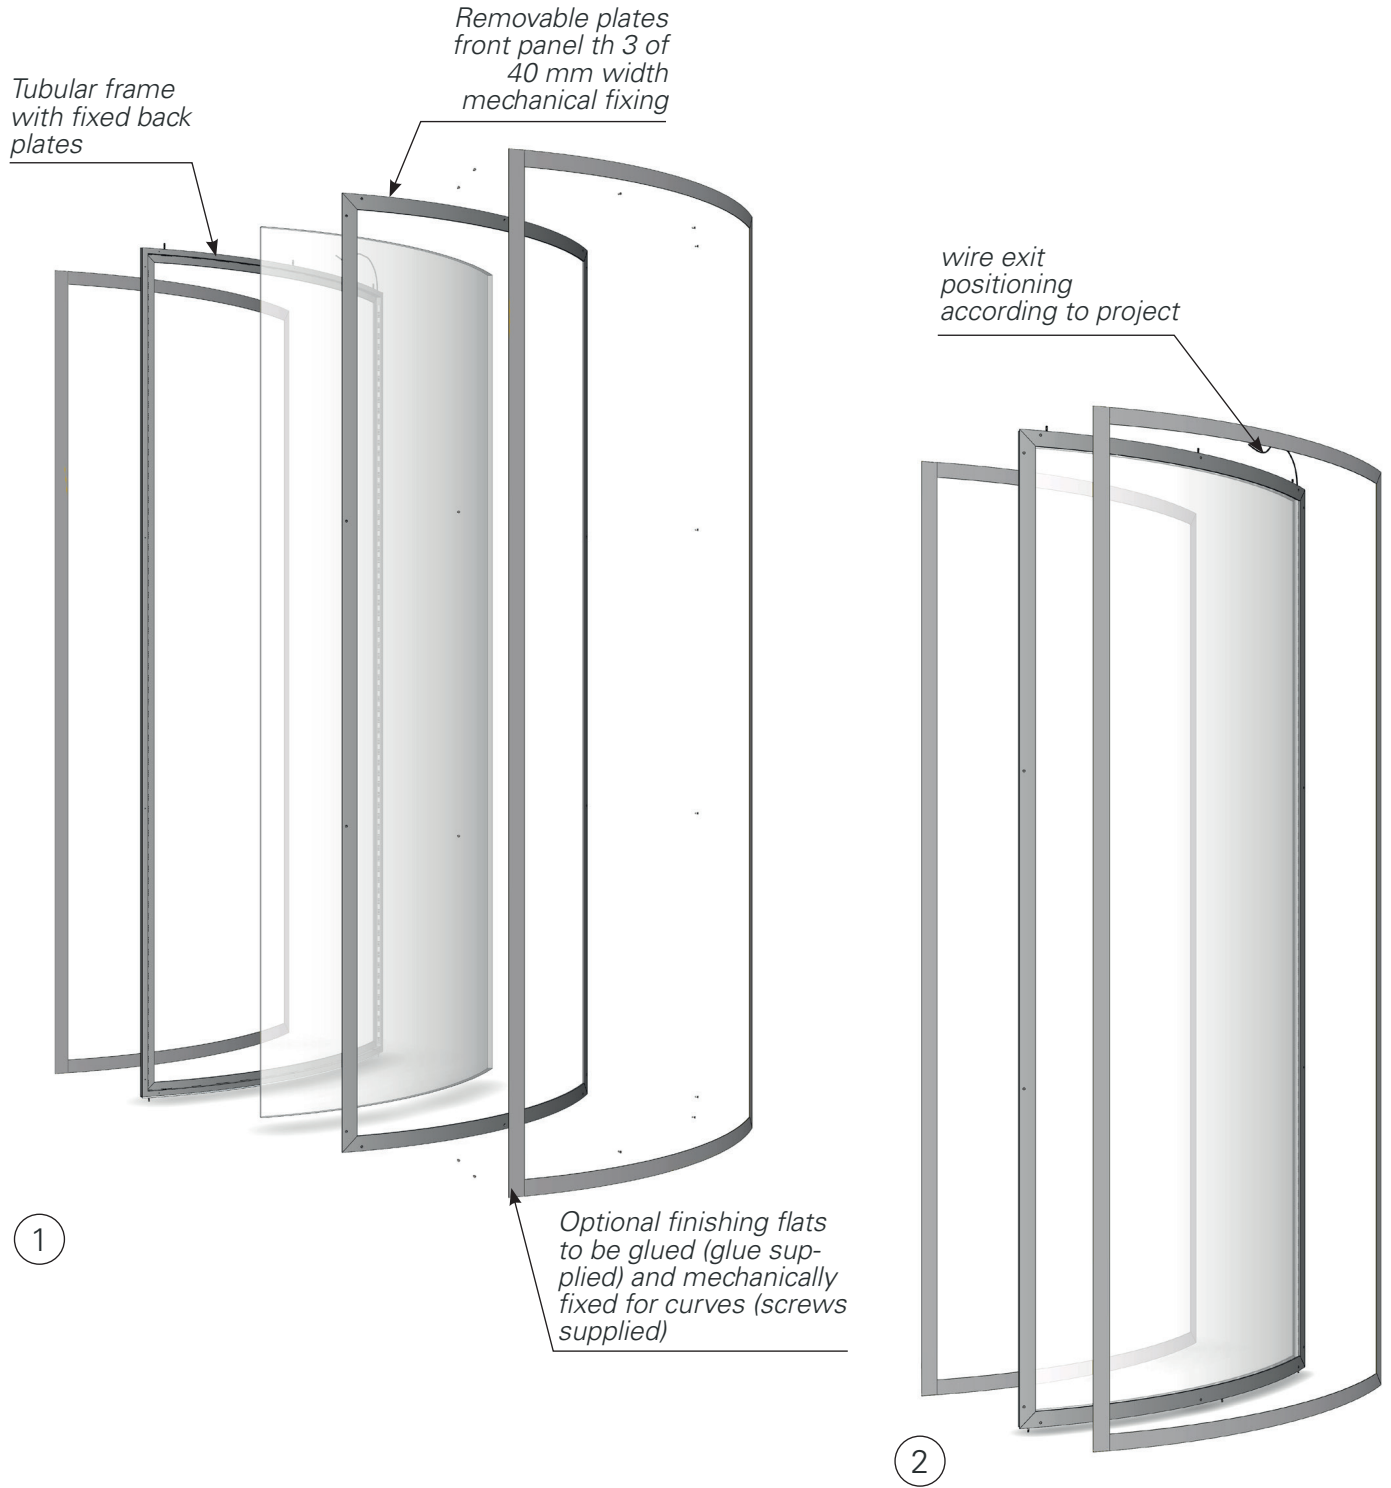


CURVED TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-B

General informations

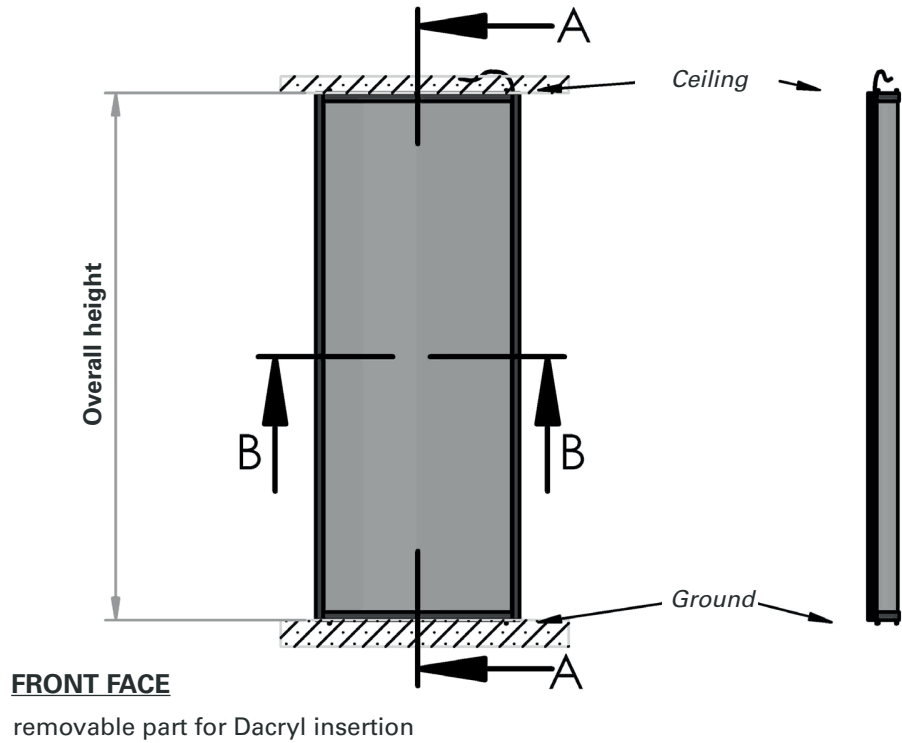


TOP VIEW

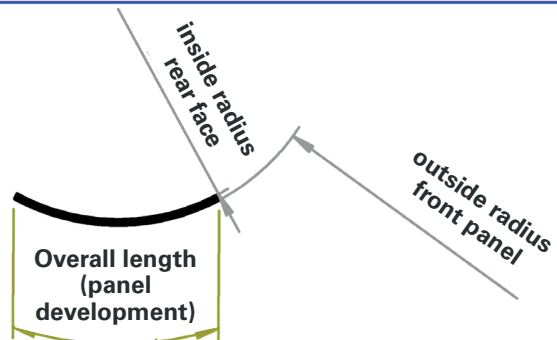

BACKSIDE

Fixed part in tubular frame

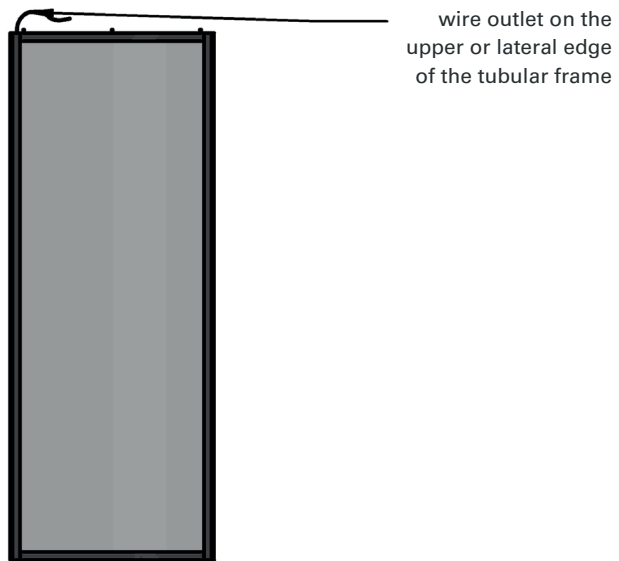

CURVED TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-B

Technical plan product description

