
A photograph of a curved glass wall with a tubular frame and multiple panels. The wall is composed of several vertical glass panels held together by a white tubular frame. The glass is covered in a pattern of small red dots, creating a starry or digital effect. The wall is set in a modern interior with a dark tiled floor and a white ceiling. The lighting is soft, highlighting the texture of the glass and the frame.

CURVED TUBULAR FRAME MULTIPLE PANELS

Technical drawing D-B


TUBULAR SYSTEM: DETAILS AND FINISHES

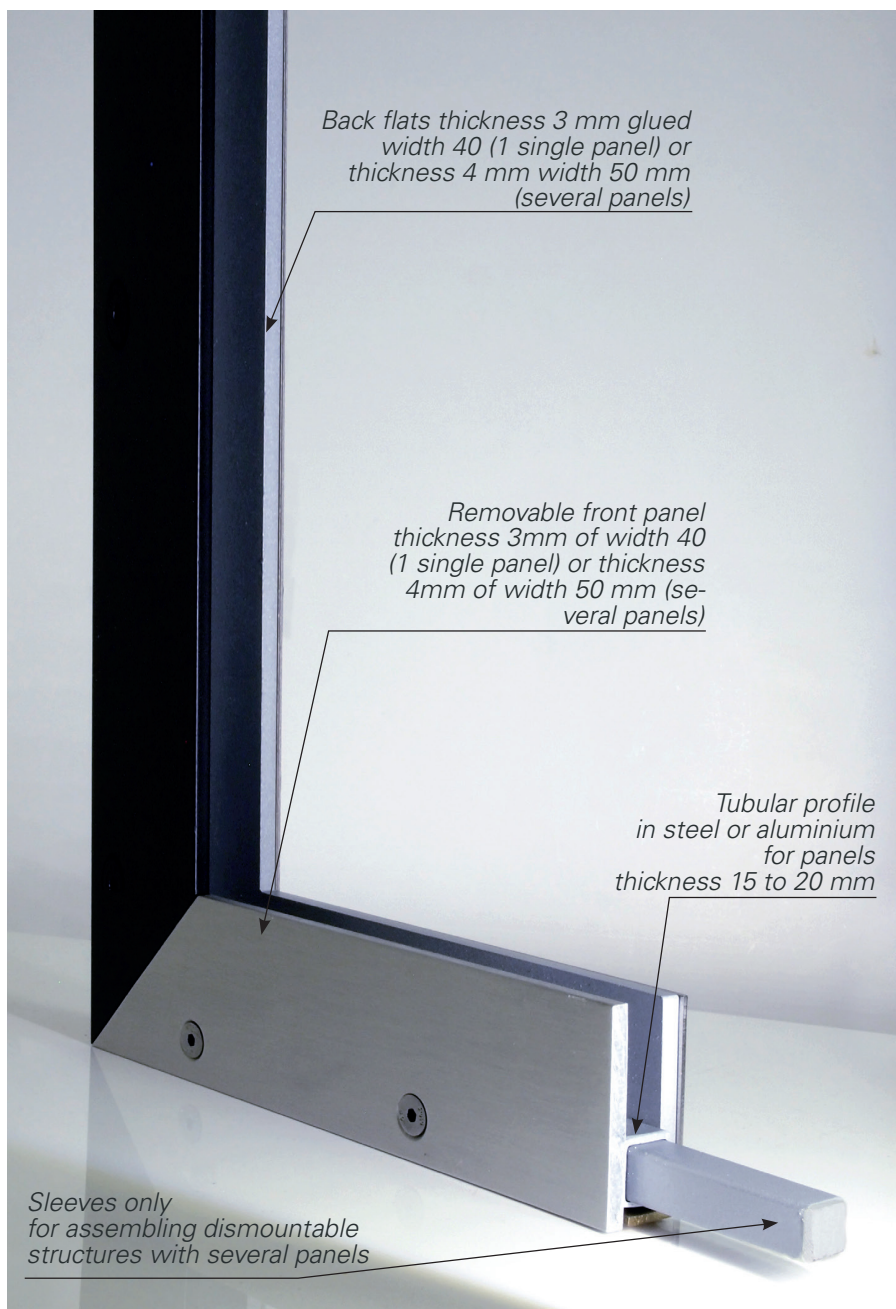


Dimensions

- Square tubular structure in steel
for Dacryl® 15 mm thick:
16 × 16 mm
- for Dacryl® th. 18 and 20 mm :
20 × 20 mm
- Square tubular structure aluminium (wet rooms)
20 × 20 mm only
- Closing dishes
width 40 mm / thickness 3 mm :
1 panel
width 50 mm / thickness 4 mm:
several panels
- Finishing plates 2 mm thick (optional)
width 40 mm : 1 panel
width 50 mm : several panels


Frame finishes



Anodized
aluminum




Black RAL 9005
Textured



Gold RAL 1036
Textured



White
RAL 9010 textured




Grey RAL 9006
Textured

Other finishes on quotations


TUBULAR SYSTEM: DETAILS AND FINISHES



Finishing dishes (optional)




Anodized aluminum




Black RAL 9005 Textured




Stainless steel Mirror polished



Brass Polished




Brushed aluminium




White RAL 9010 textured




Stainless steel Brushed



Brass Brushed



Gold RAL 1036 Textured



Grey RAL 9006 Textured

CURVED TUBULAR FRAME: MULTIPLE PANELS

Technical drawing ref. D-B



Curved tubular frame, finish: white lacquered

Uses

- Partition wall straight / verse
- Impost
- Wall mounted

Fixations

- Floor - ceiling
- Floor - wall

Dimensions

- Square tubular structure in steel
for Dacryl® 15 mm thick:
16 × 16 mm
for Dacryl® th. 18 and 20 mm :
20 × 20 mm
- Square tubular structure aluminium (wet rooms)
20 × 20 mm only
- Closing dishes
width 50 mm / thickness 4 mm
- Finishing plates 2 mm thick (optional)
width 50 mm

Deliverables


Delivered dismantled:

- Dacryl® panels with protections
- Dismantled tubular frame:
2 vertical uprights + 2 horizontal uprights to be mechanically assembled + closing plates (screws supplied)
- Led lighting with welded wire outlet, in roll ready to lay and connect
- Power supply 220 V for 12v led lighting
- Optional finishing dishes delivered separately, ready to glue (glue supplied)

CURVED TUBULAR FRAME: MULTIPLE PANELS


Technical drawing ref. D-B

Description of deliverables

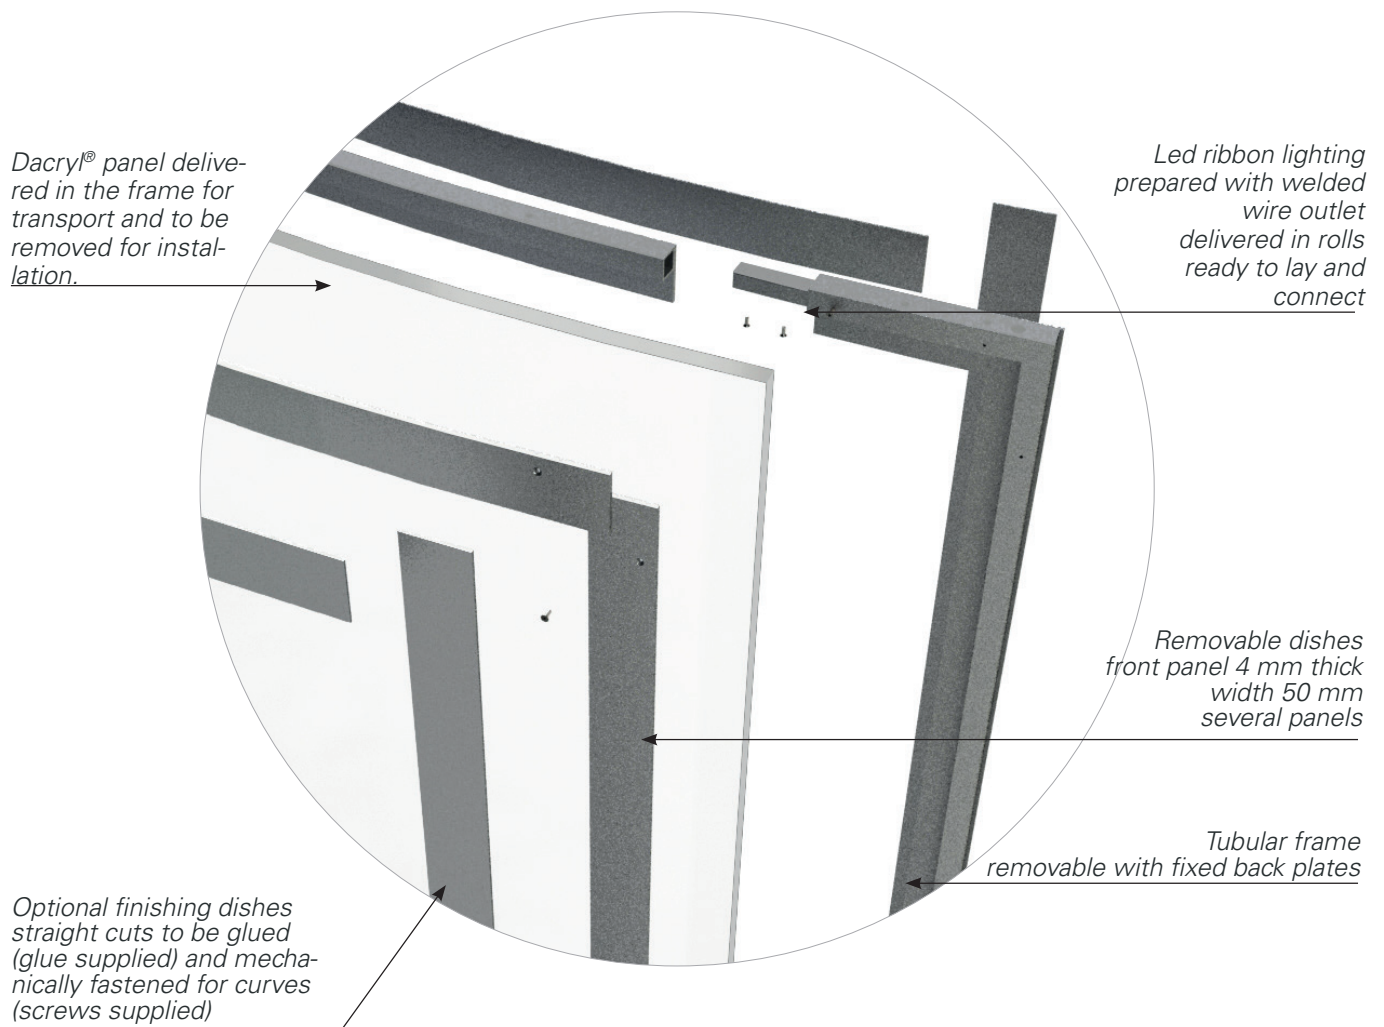

CURVED TUBULAR FRAME: MULTIPLE PANELS


Technical drawing ref. D-B

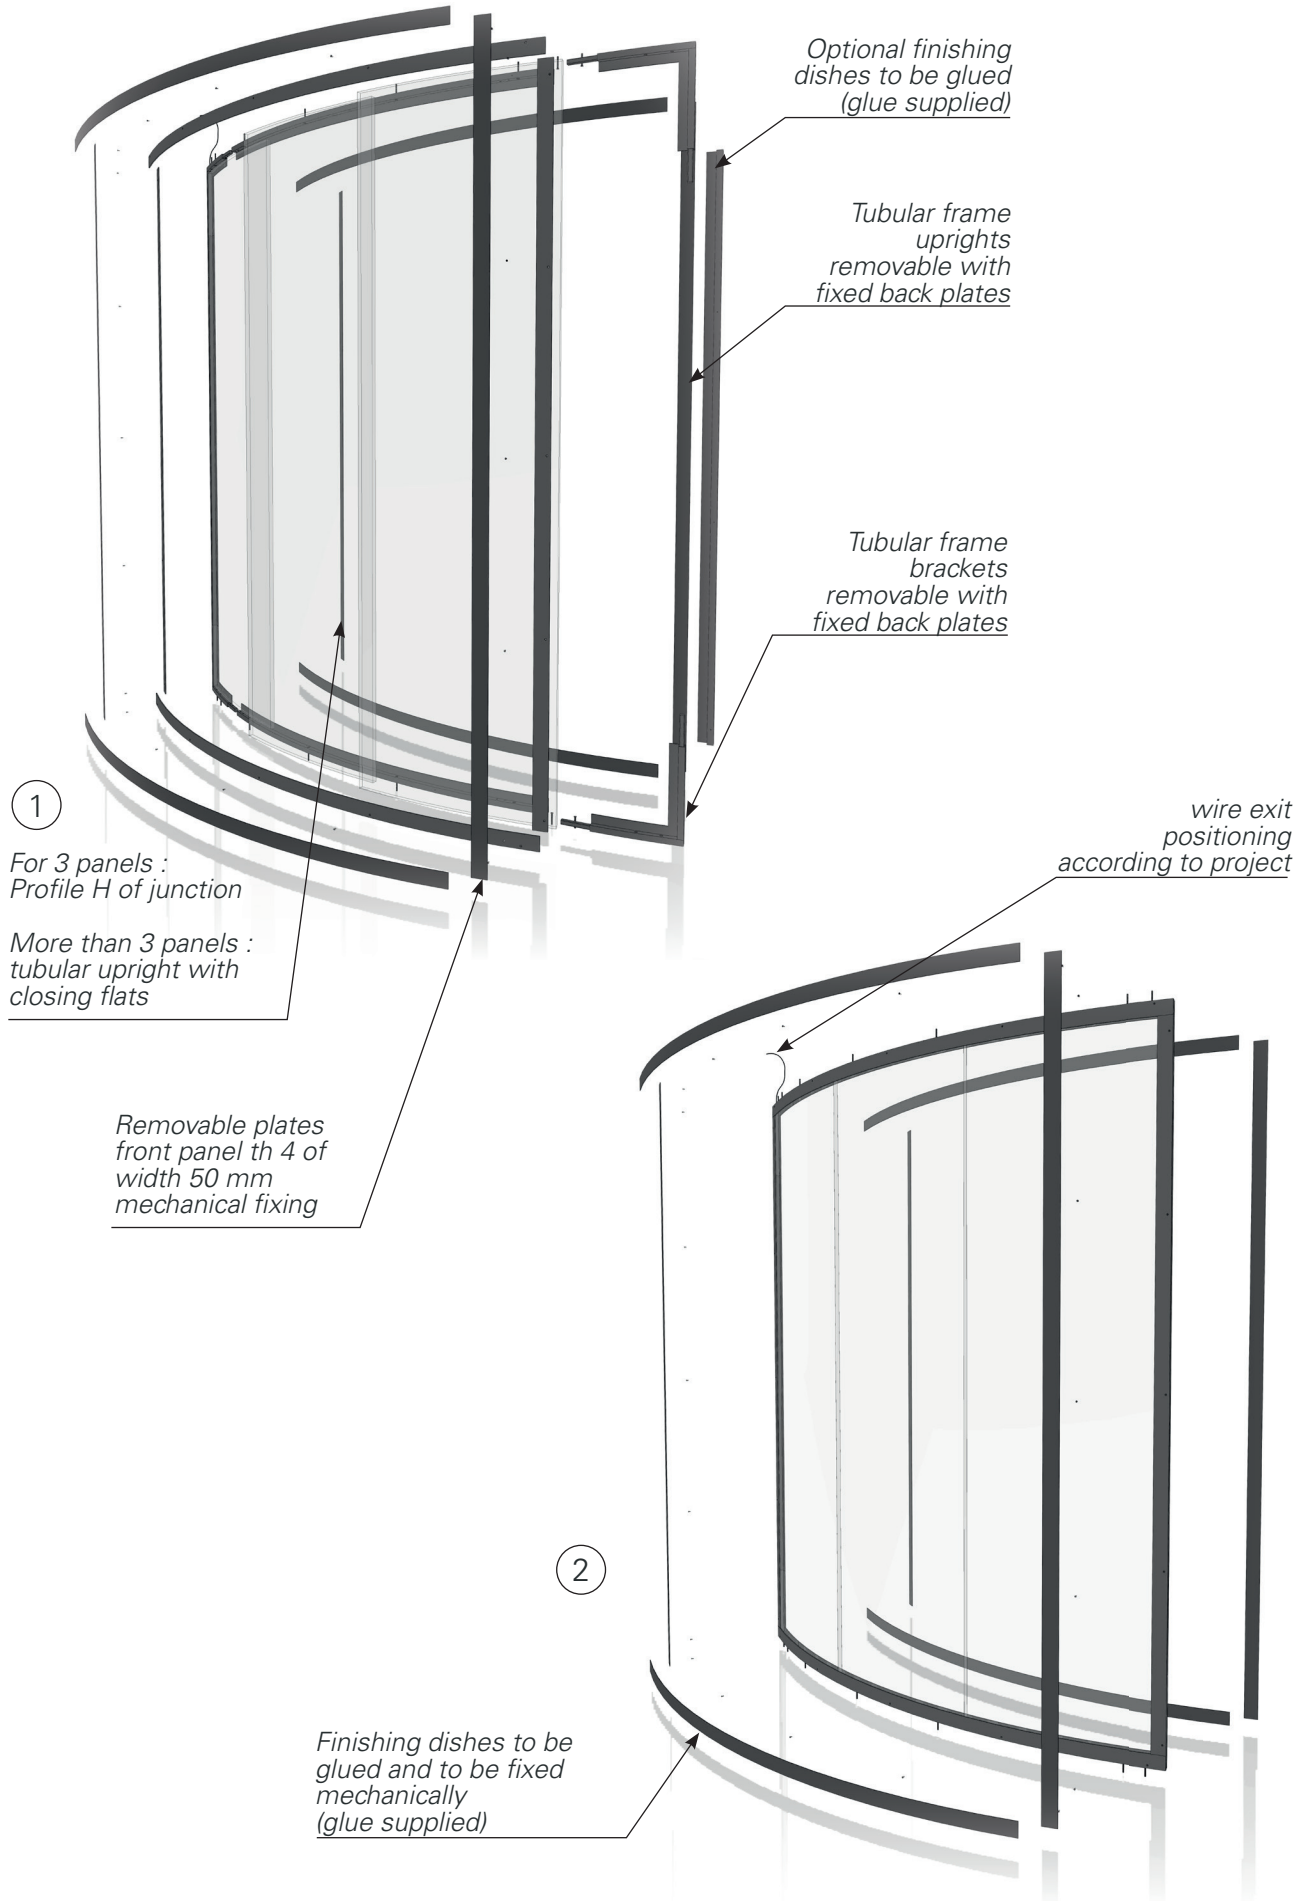

CURVED TUBULAR FRAME: MULTIPLE PANELS


Technical drawing ref. D-B

General informations

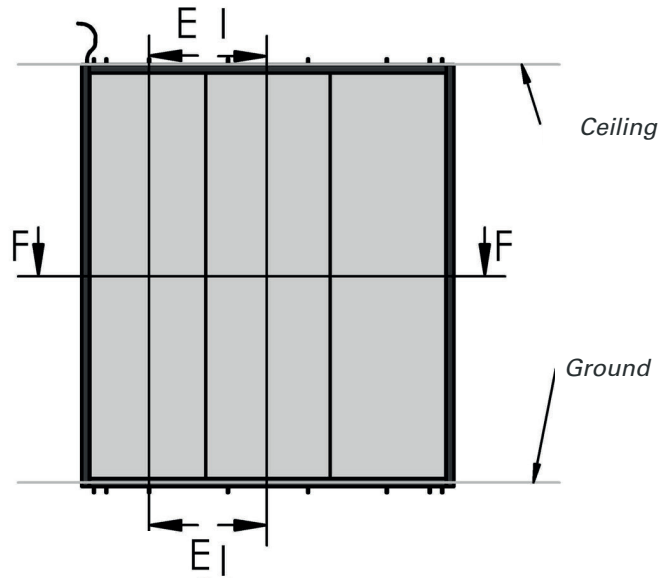


FRONT FACE

removable part for Dacryl insertion

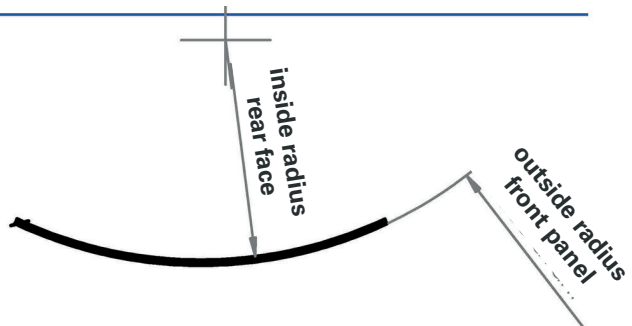

TOP VIEW

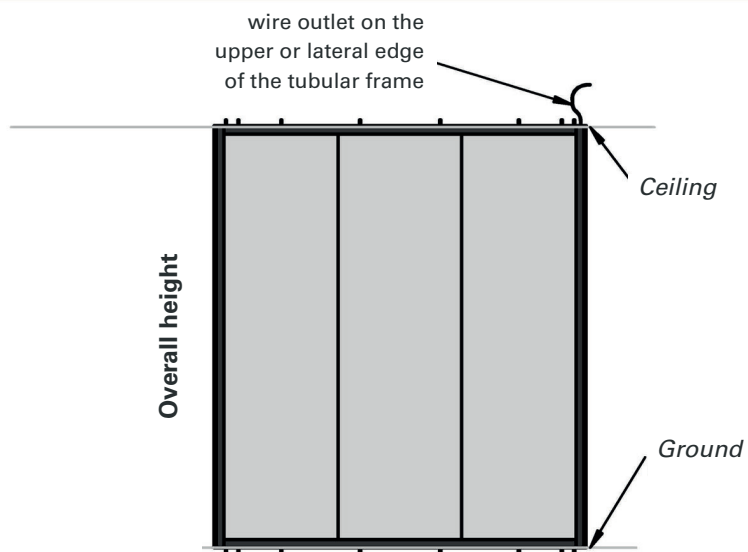



BACKSIDE

Fixed part in tubular frame

CURVED TUBULAR FRAME: MULTIPLE PANELS

Technical drawing ref. D-B

Technical plan product description

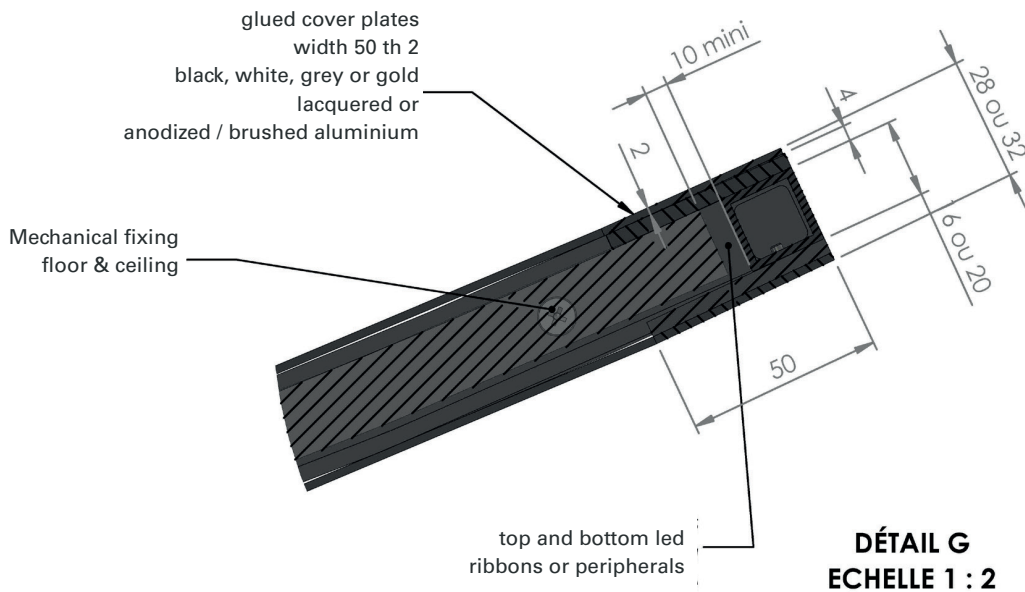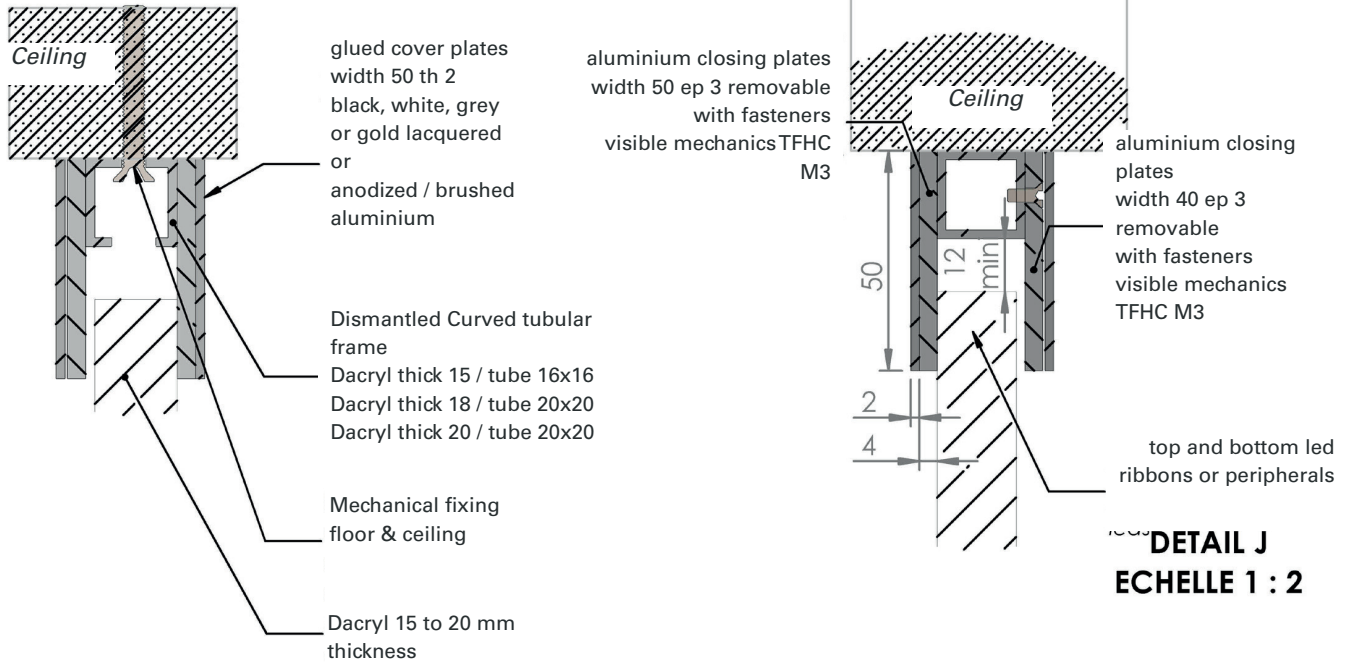

CURVED TUBULAR FRAME: MULTIPLE PANELS

Straight Dacryl® set composed of more than 3 Dacryl® CURVED panels

Only on consultation for study and costing

