



SLIDING DOOR: DETAILS AND FINISHES

Opening frame

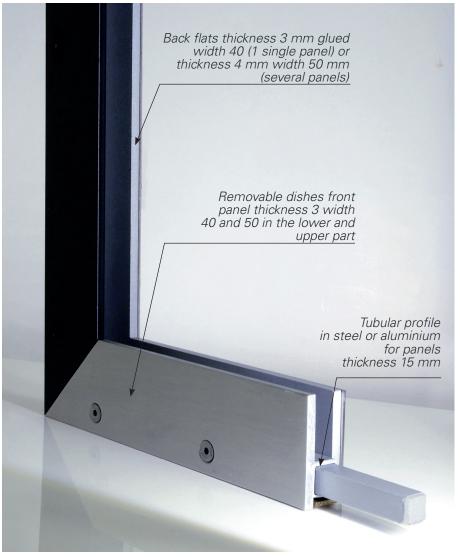

Dimensions

- Square tubular structure in steel for Dacryl® 15 mm thick: 16 × 16 mm
- <u>Closing dishes</u> width 40 and 50 mm in lower and upper part
- Finishing plates 2 mm thick width 40 and 50 mm in lower and upper part

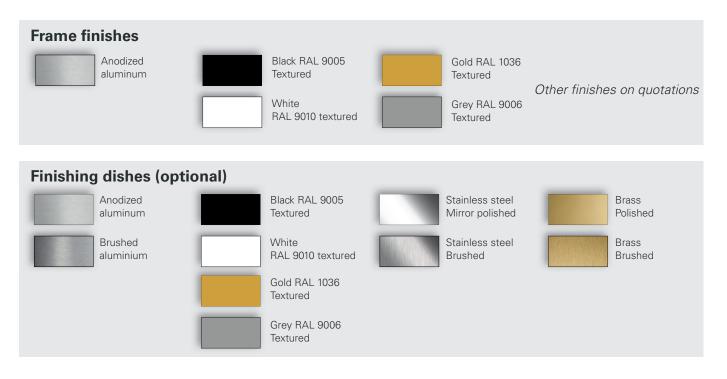

Technical drawing R-1



Uses

- In impost
- . For 1 door
- . Rail length 3m

Bindings

. Ceiling mounted rail or wall mounted

Option

- · Led lightning
- . Finishing dishes
- · Dacryl® handle


Dimensions

- Maximum weight 80 kg rail for Dacryl thickness 15 mm
- Maximum weight 120 kg rail for Dacryl thickness 20 mm
- · <u>Closing dishes</u> width: 40 and 50 mm thickness 3 mm
- Finishing dishes width: 40 and 50 mm thickness 2 mm


Our systems can be adapted to all other brands of sliding rail systems (Scrigno,...) excluding glass clamps.

Technical drawing R-1


Description of deliverables

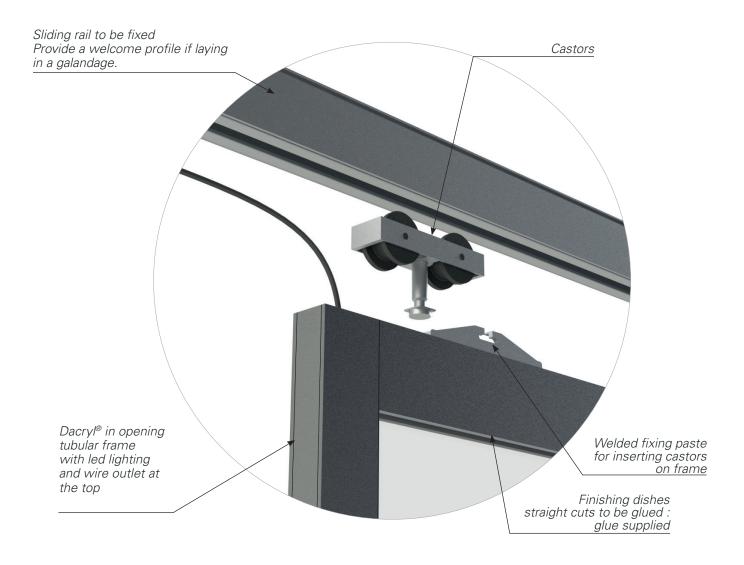


Technical drawing R-1

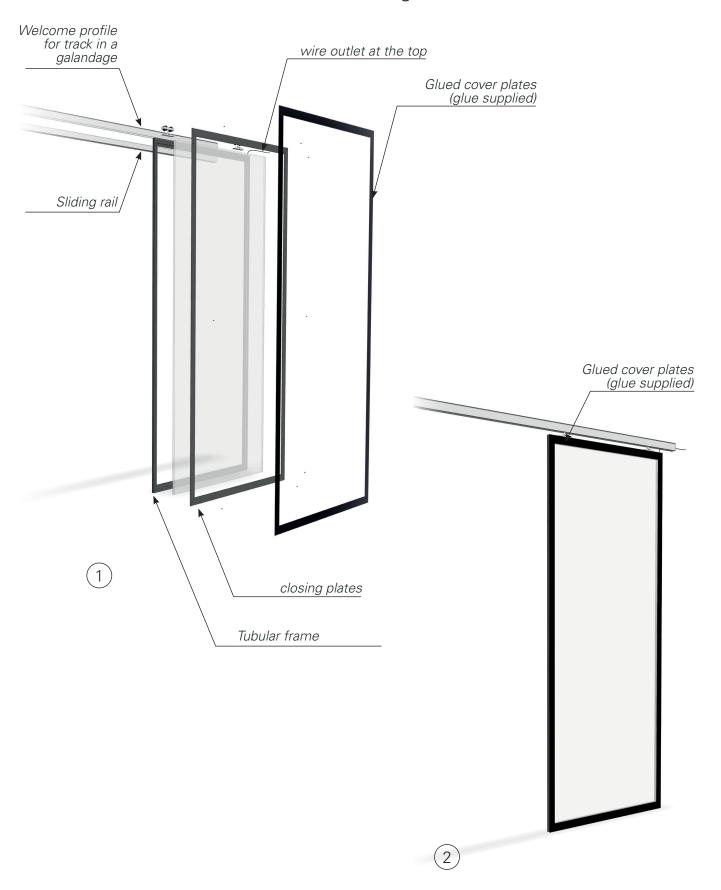

Technical drawing R-1

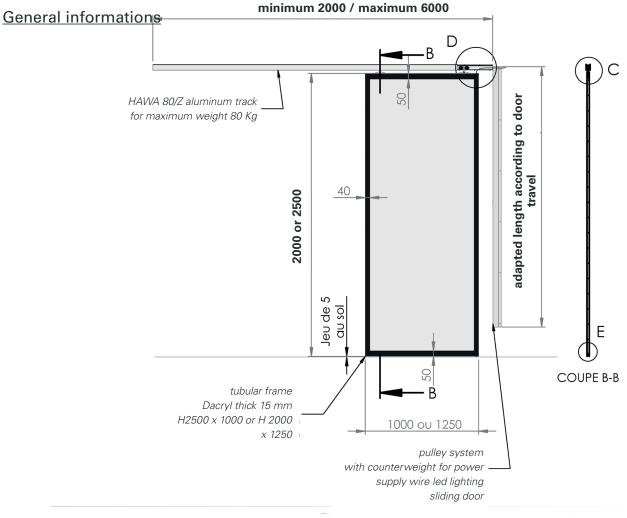

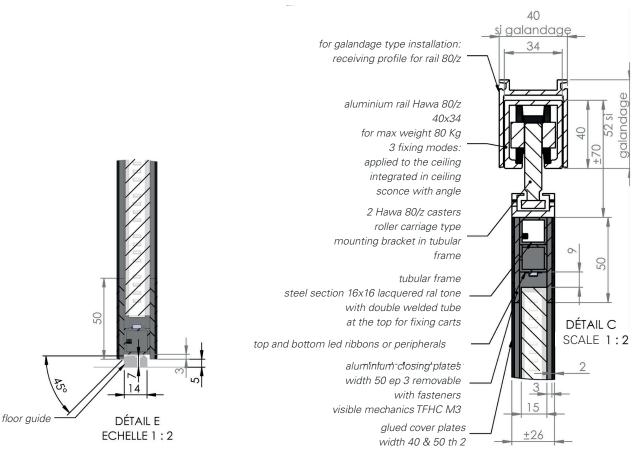

SLIDING DOOR: PULLEY AGAINST WEIGHT

Technical drawing CP

