



The image is a technical drawing, labeled E-2, illustrating a glass railing system. It features two vertical glass panels. The left panel is shown in a perspective view, revealing its internal structure with numerous small, white, circular spacers distributed throughout the glass. The right panel is shown in a side view, highlighting the dark, rectangular cover caps that are attached to the edges of the glass. The railing is set against a light-colored wall and a dark floor. The drawing is presented in a clean, professional style with clear lines and shading.

SPACERS AND COVER CAPS PERIPHERAL PROFILES

Technical drawing E-2

COLORLESS SPACERS AND SCREW COVERS : DETAILS AND FINISHES



Dimensions











- U profiles
for Dacryl® 15 mm thick:
20 × 20 mm / 2 mm thickness
- for Dacryl® 18 & 20 mm thick:
25 × 25 mm / 2 mm thickness

- Colorless spacers
15 mm lenght

Specifics

- No bending
- Mirror-polished stainless steel,
polished and brushed brass
finishes on order only for 25x25
U profiles

Finishing U profile

	Anodized aluminum		Black RAL 9005 Textured		Stainless steel Mirror polished		Brass Polished
	chromed aluminium		White RAL 9010 textured		Stainless steel Brushed		Brass Brushed
			Gold RAL 1036 Textured				
			Grey RAL 9006 Textured				



Screw cover, finish: brass



Screw cover, finish: chrome



Wall offset

- 15 mm

Diamètres

- 12 mm : screws ø3.5 max /
screw head ø6
- 18 mm : screws ø6 max /
screw head ø20

Finishes

- chrome
- brass

SPACERS AND COVER CAPS: PERIPHERAL PROFILES

Technical drawing E-2



Colorless spacers and aluminum screw covers. Anodized aluminum profiles

Uses

- Wall fixing

Bindings

- On a flat surface

Dimensions

- Lateral U-profiles

for Dacryl® 15 mm thick:

20 × 20 mm / 2 mm thickness

for Dacryl® 18 & 20 mm thick:

25 × 25 mm / 2 mm thickness

Deliverables


Livré monté:

- Delivered assembled:
- Dacryl® panels with protections and mounted U-profiles with integrated led lighting
- Wire output soldered on leds, ready to connect
- Power supply 220 V for 12v led lighting
- Screw covers and spacers colourless supplied for installation (mounting screws not included)

SPACERS AND COVER CAPS: PERIPHERAL PROFILES


Technical drawing E-2

Description of deliverables

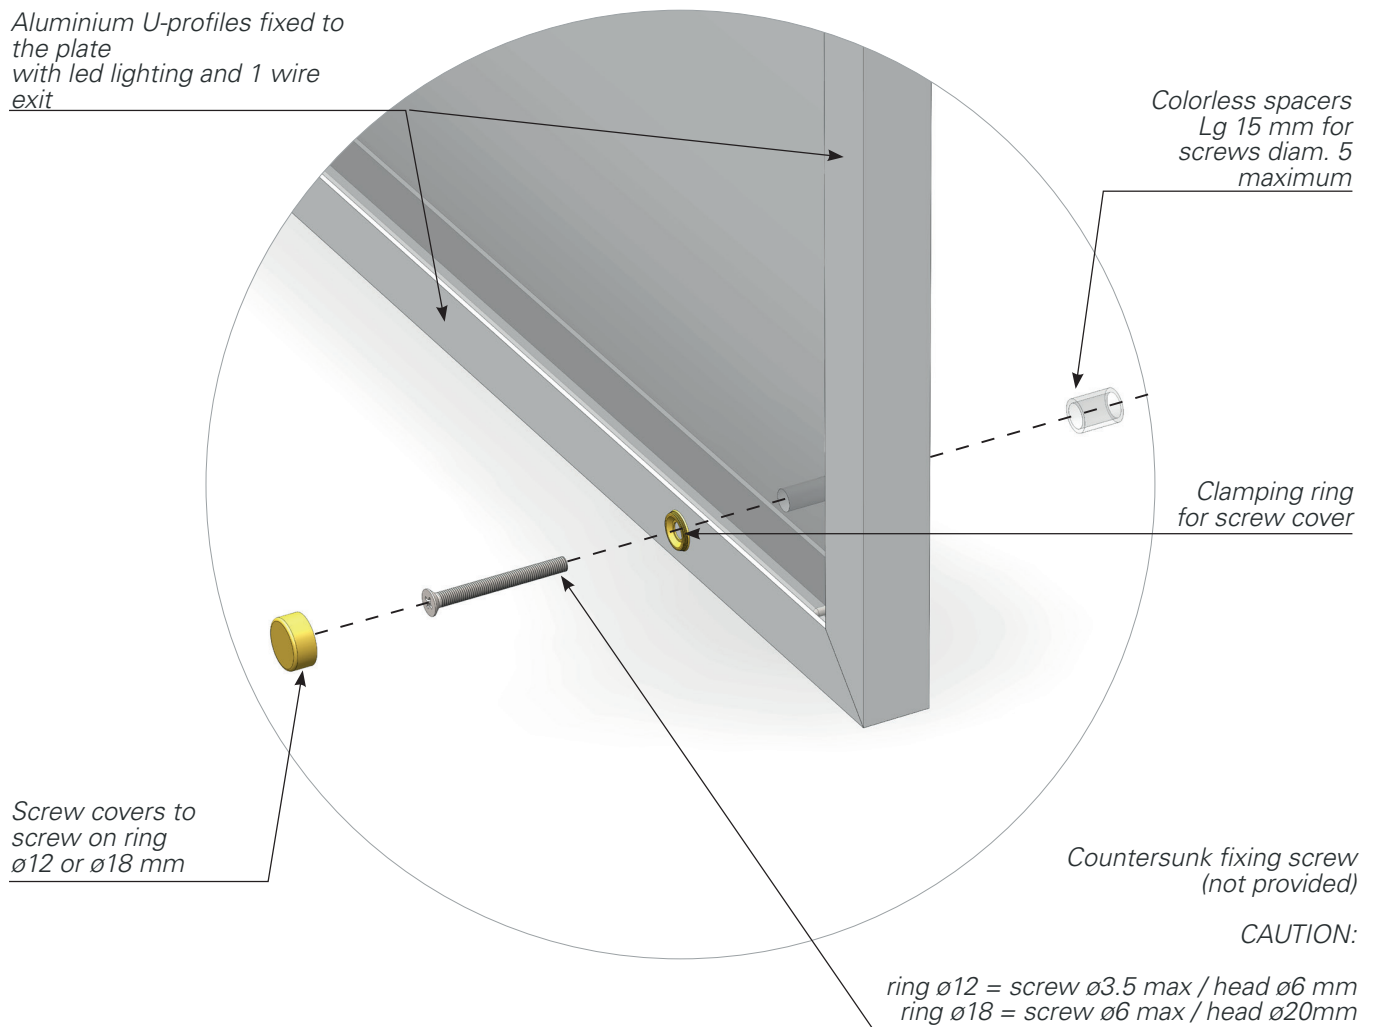

SPACERS AND COVER CAPS: PERIPHERAL PROFILES


Technical drawing E-2

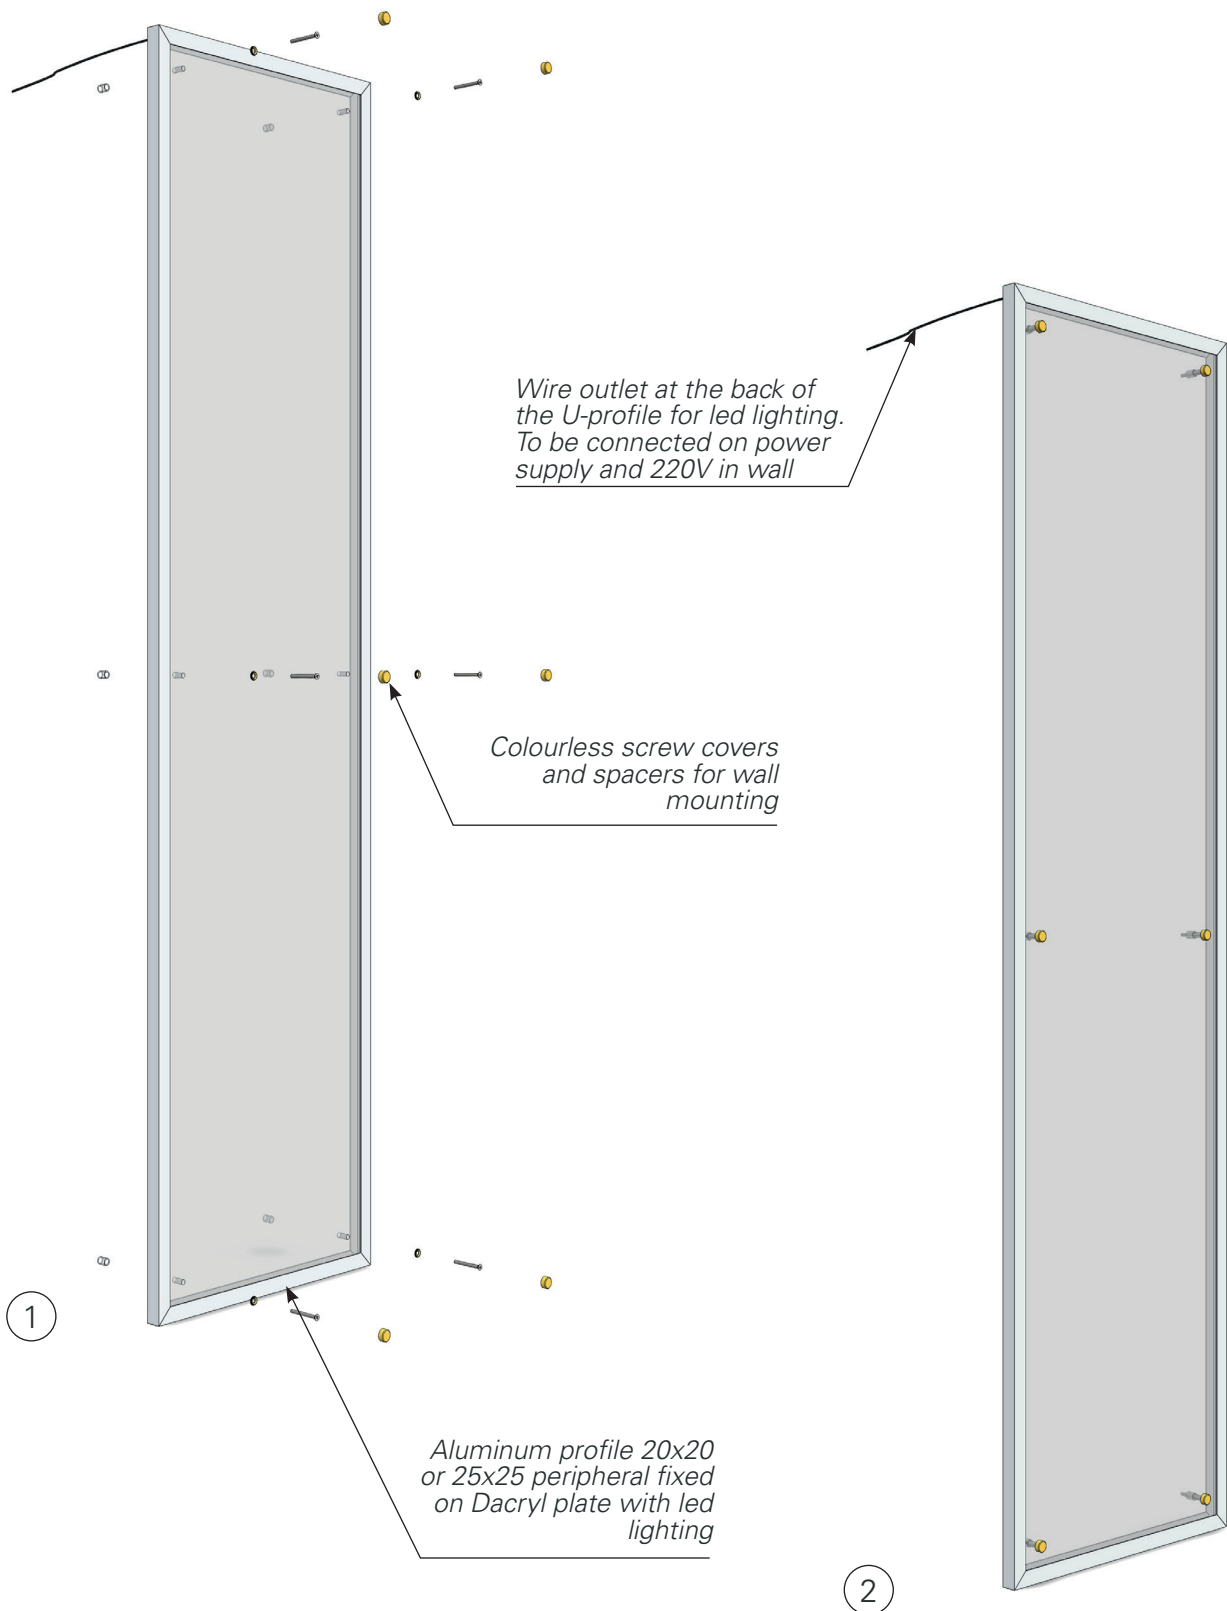

SPACERS AND COVER CAPS: PERIPHERAL PROFILES

Technical drawing E-2

General informations

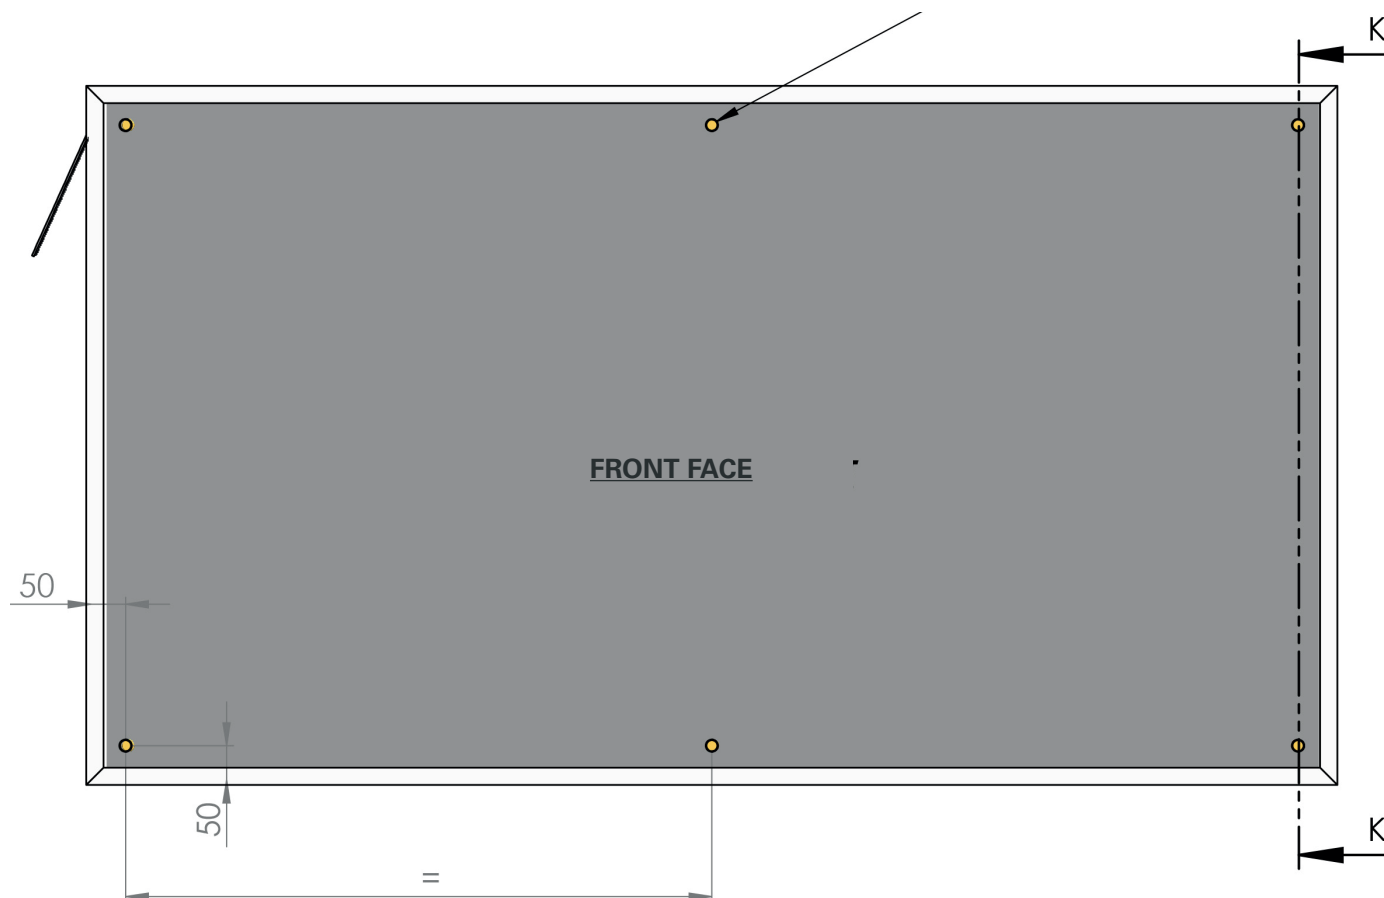

Technical plan product description

fixing screw aluminium profile U: TF stainless steel screw A2 $\varnothing 3 \times 16$

led ribbon : positioned on the front of the panel

screw covers:

2 diameters available :

$\varnothing 12$ or 18 (for $\varnothing 3.5$ or 5 screws)

3 finishes available:

Brass, Chrome, Aluminum

colorless spacers:
- $\varnothing 10$ mm
- lengths 15 mm
for $\varnothing 5$ mm screws

DÉTAIL L
SCALE 1 : 2