


SPACERS AND COVER CAPS TOP AND BOTTOM PROFILES

Technical drawing E-1



COLORLESS SPACERS AND SCREW COVERS : DETAILS AND FINISHES

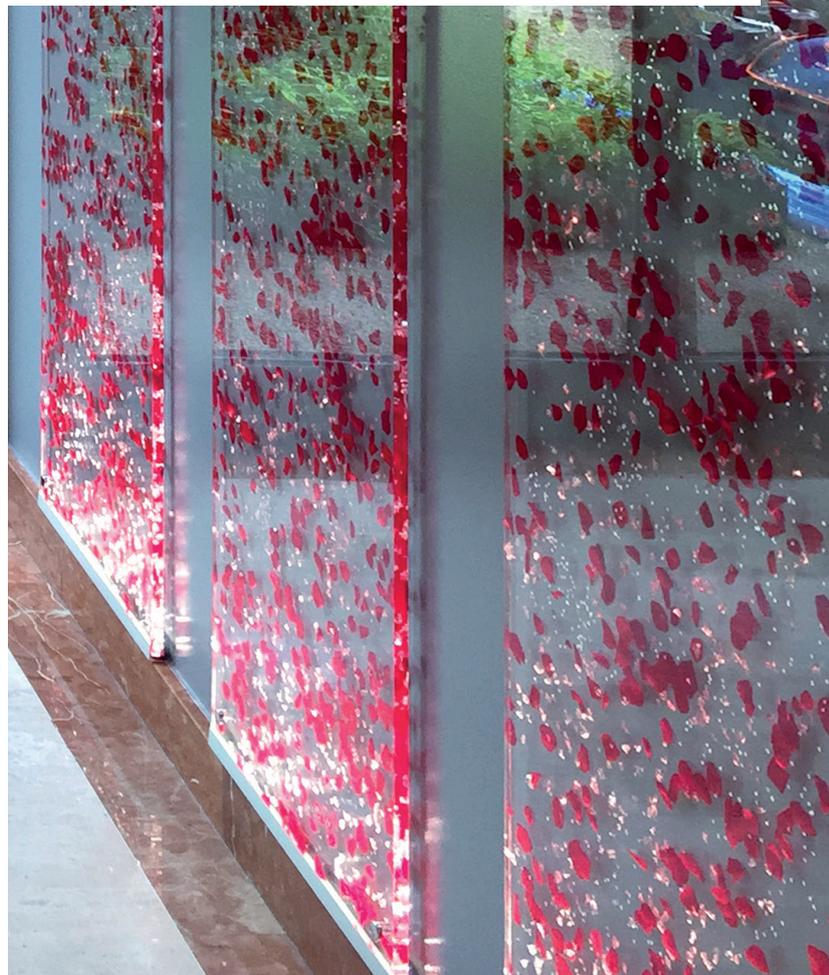

Dimensions

· U profiles

for Dacryl® 15 mm thick:

20 × 20 mm / 2 mm thickness

for Dacryl® 18 & 20 mm thick:

25 × 25 mm / 2 mm thickness

· Colorless spacers

15 mm length

Specifics

· No bending


· Mirror-polished stainless steel,
polished and brushed brass
finishes on order only for 25x25

U profiles

Finishing U profile



Anodized
aluminum



Black RAL 9005
Textured



Stainless steel
Mirror polished



Brass
Polished



chromed
aluminium




White
RAL 9010 textured




Stainless steel
Brushed



Brass
Brushed



Gold RAL 1036
Textured



Grey RAL 9006
Textured



Screw cover, finish: brass



Screw cover, finish: chrome



Wall offset

· 15 mm

Diamètres

· 12 mm : screws $\varnothing 3.5$ max /
screw head $\varnothing 6$

· 18 mm : screws $\varnothing 6$ max /
screw head $\varnothing 20$

Finishes

· chrome

· brass

SPACERS AND COVER CAPS: TOP AND BOTTOM PROFILES

Technical drawing E-1



Colorless spacers and chrome cabochons. Anodized aluminum profiles

Uses

- Applique murale

Bindings

- On a flat surface

Specifics

- Not suitable for inclusions :
Broken glass
Glass Bubbles
Mother of pearl

Dimensions

- Lateral U-profiles
for Dacryl® 15 mm thick:
20 × 20 mm / 2 mm thickness
for Dacryl® 18 & 20 mm thick:
25 × 25 mm / 2 mm thickness

Deliverables


Delivered assembled:

- Dacryl® panels with protections and mounted U-profiles with integrated led lighting
- Wire output soldered on leds, ready to connect
- Power supply 220 V for 12v led lighting
- Screw covers and spacers colourless supplied for installation (mounting screws not included)

SPACERS AND COVER CAPS: TOP AND BOTTOM PROFILES


Technical drawing E-1

Description of deliverables

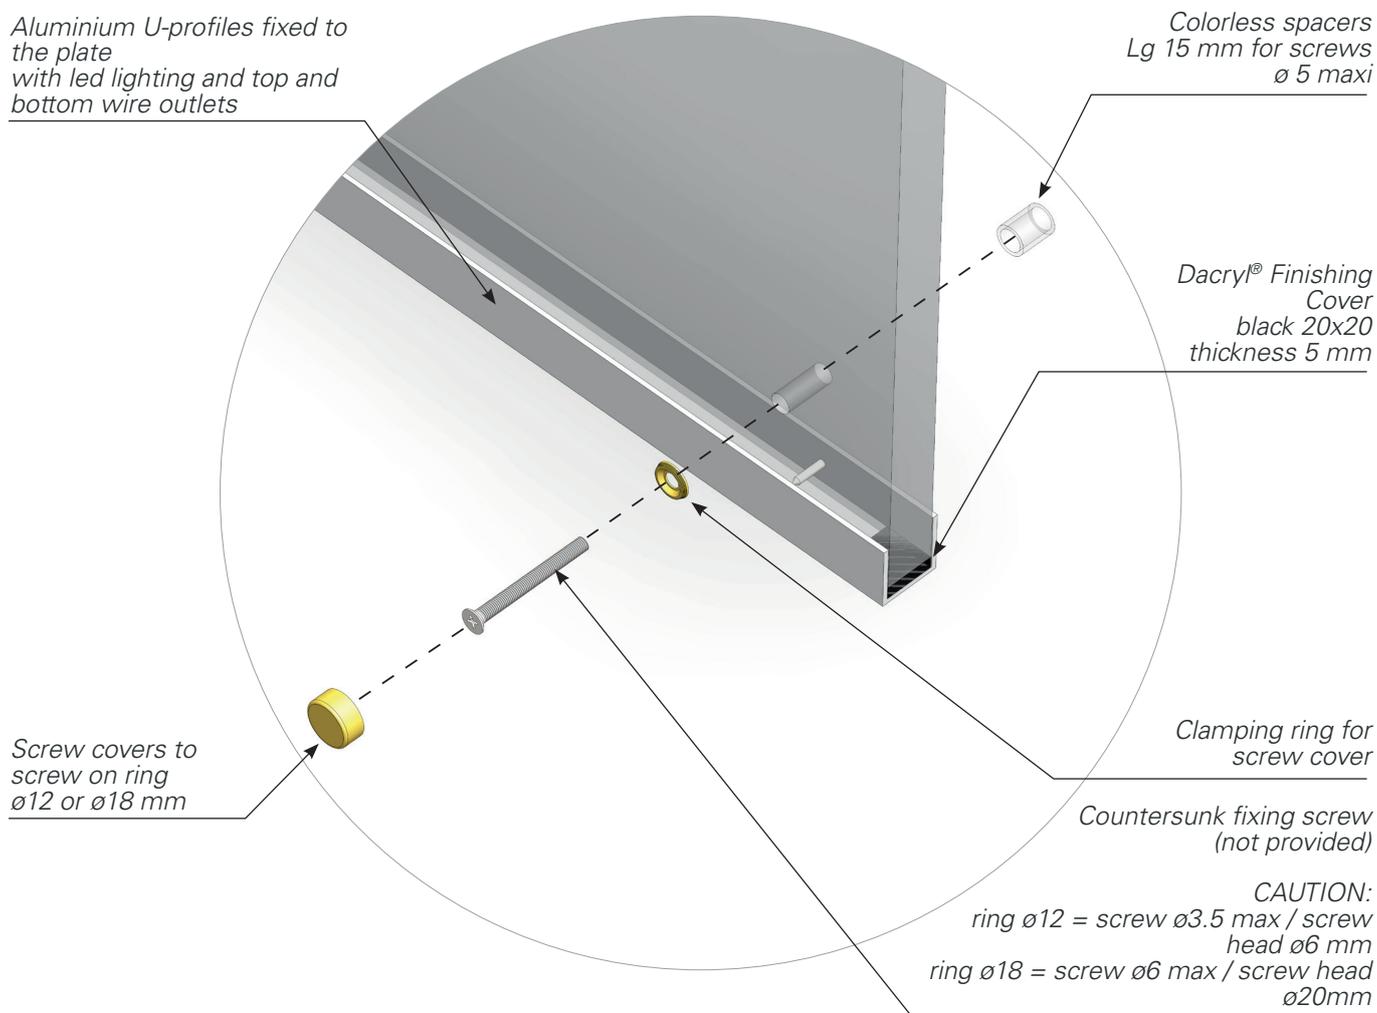

SPACERS AND COVER CAPS: TOP AND BOTTOM PROFILES


Technical drawing E-1

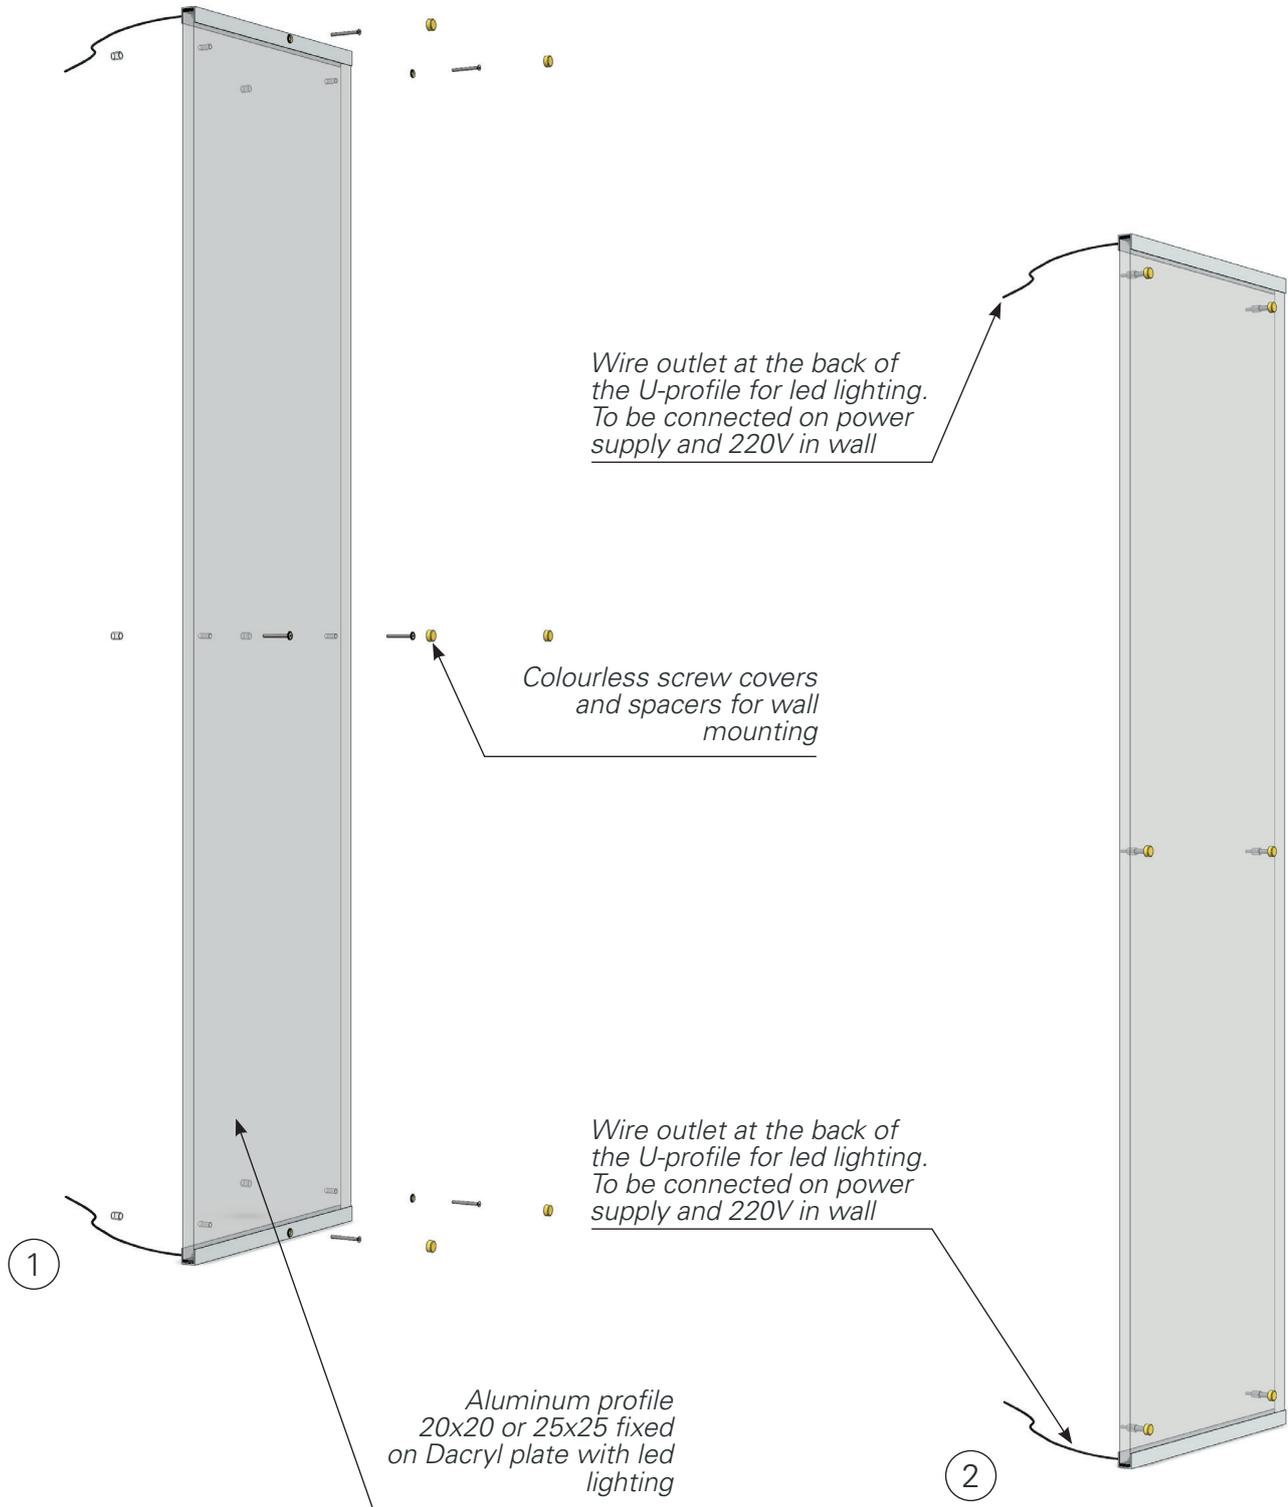

SPACERS AND COVER CAPS: TOP AND BOTTOM PROFILES

Technical drawing E-1

General informations

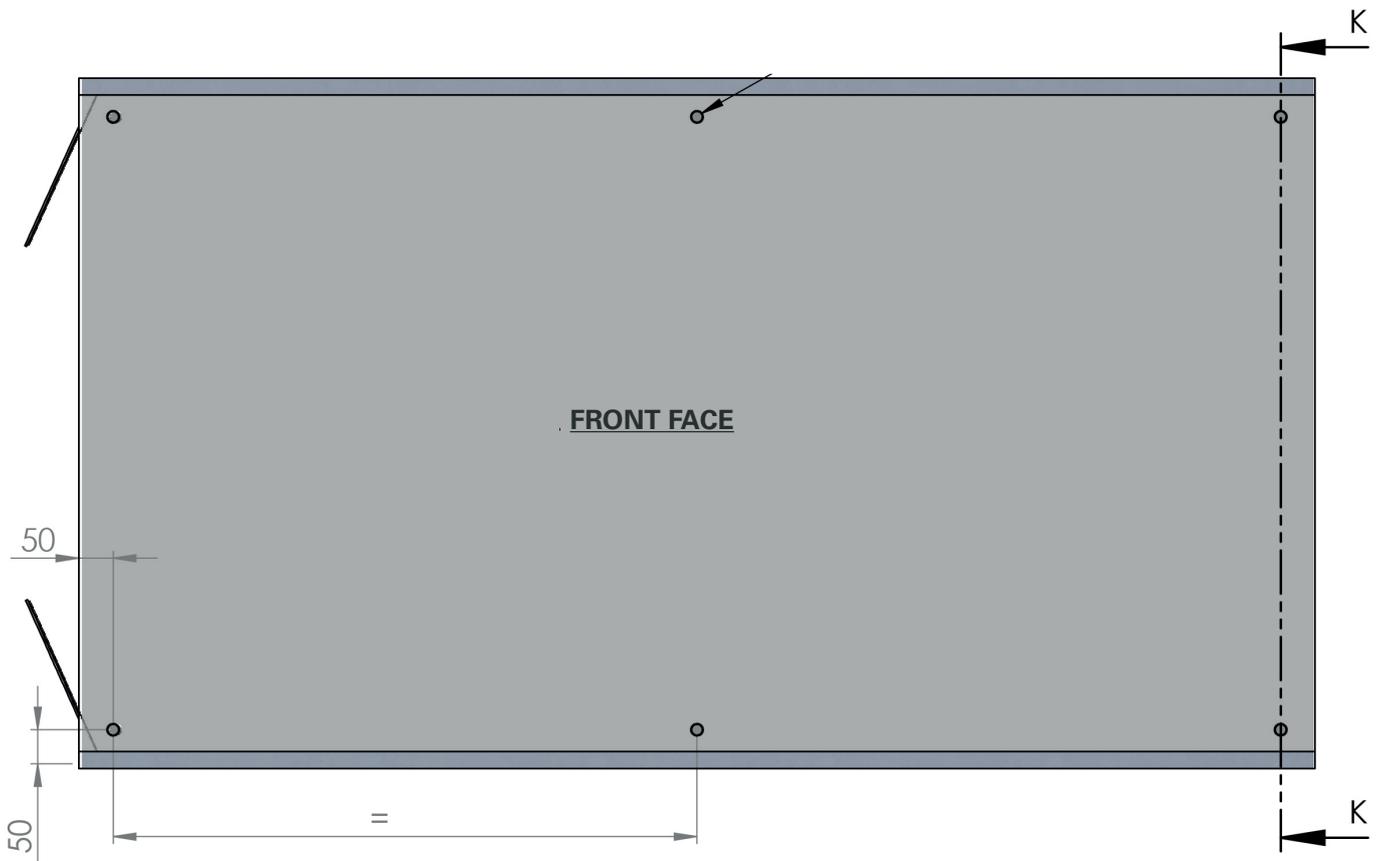

Technical plan product description

fixing screw aluminium profile U:TF stainless steel screw A2 $\phi 3 \times 16$

led ribbon : positioned on the front of the panel

screw covers:
2 diameters available :
 $\phi 12$ or 18 (for $\phi 3.5$ or 5 screws)
3 finishes available:
Brass, Chrome, Aluminum

colorless spacers:
- $\phi 10$ mm
- lengths 15 mm
for $\phi 5$ mm screws

DÉTAIL L
SCALE 1 : 2