



# STRAIGHT TUBULAR FRAME SINGLE PANEL

Technical drawing C-A

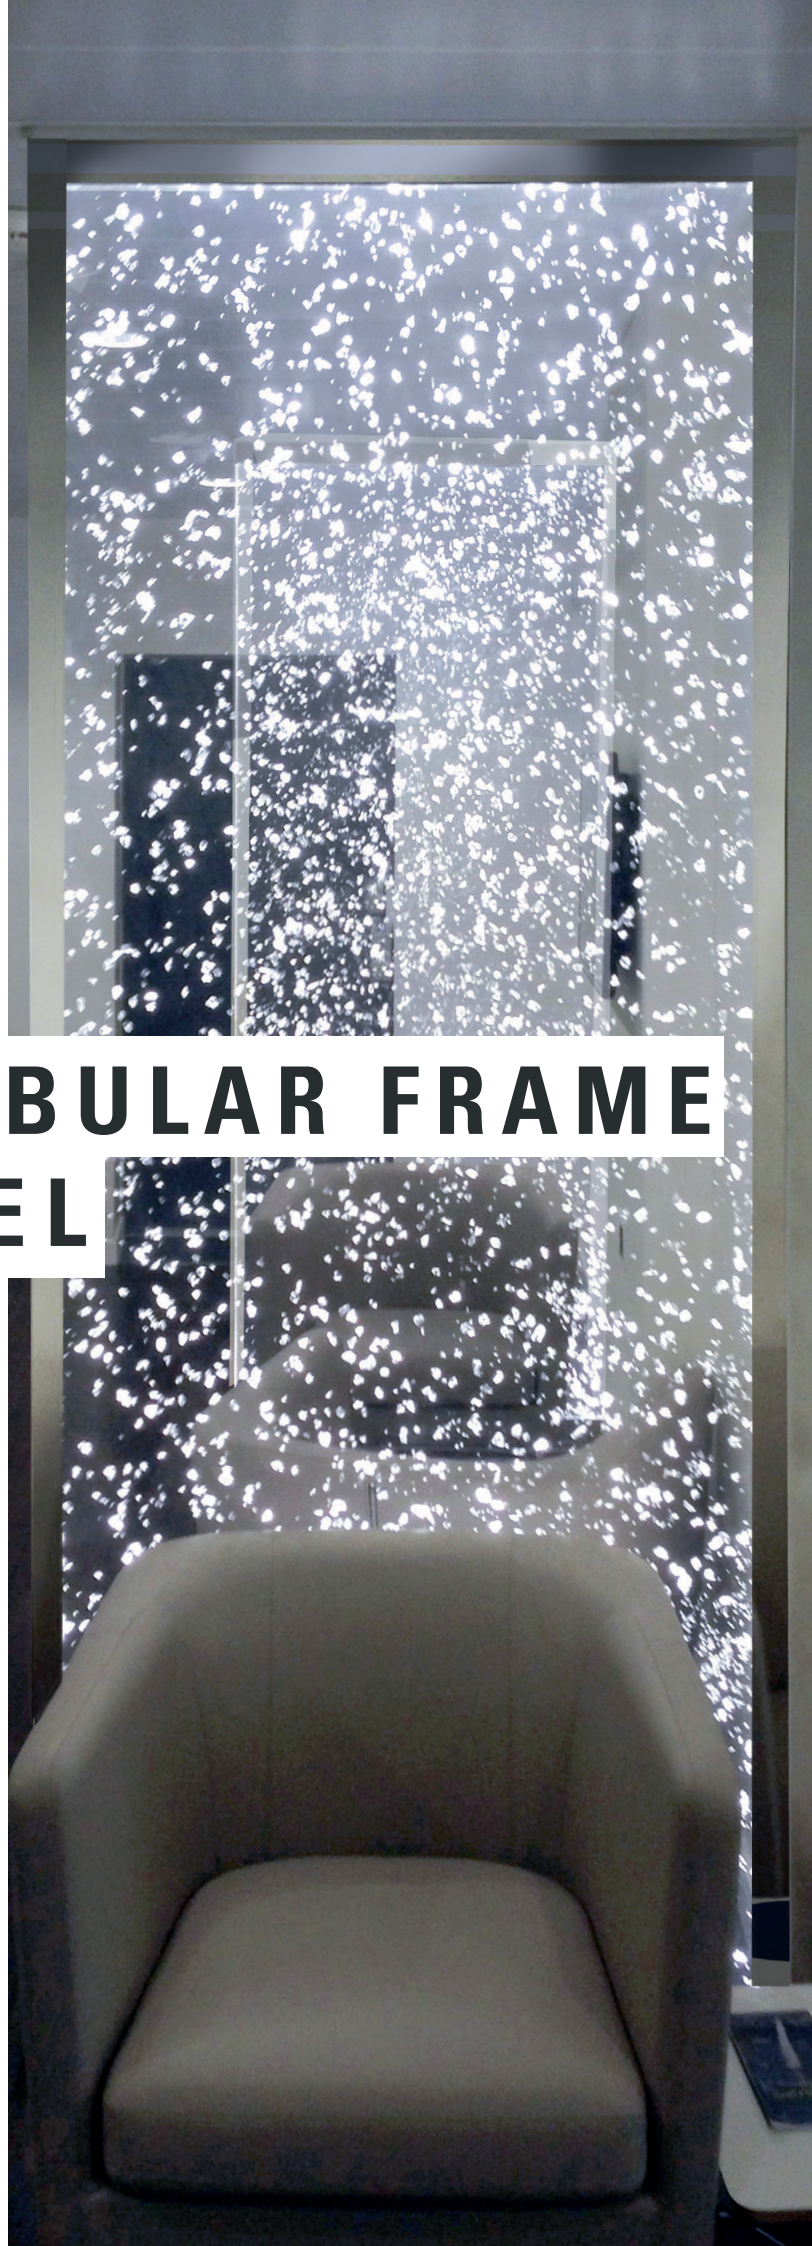


# TUBULAR SYSTEM: DETAILS AND FINISHES

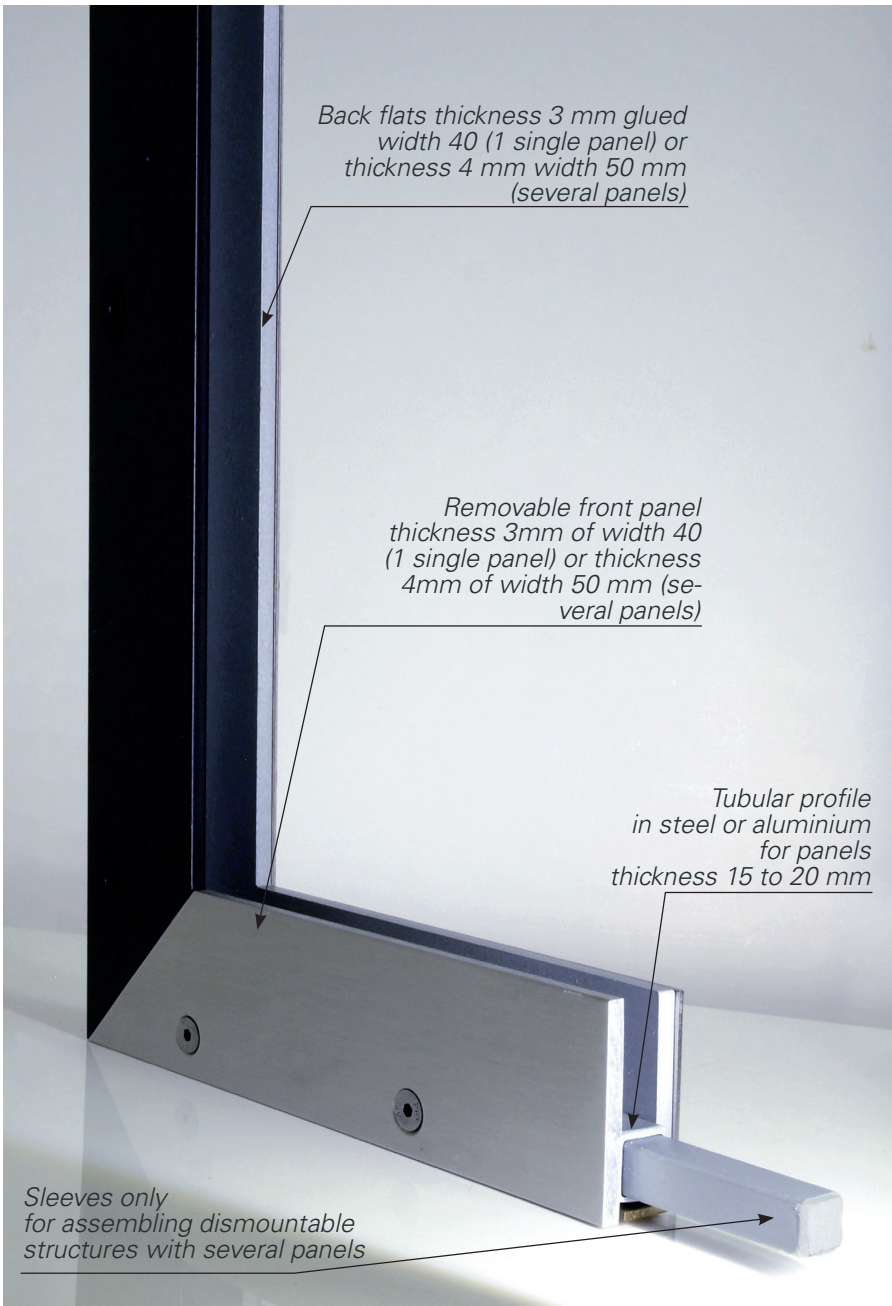


## Dimensions

- Square tubular structure in steel  
for Dacryl® 15 mm thick:  
16 × 16 mm
- for Dacryl® th. 18 and 20 mm :  
20 × 20 mm
- Square tubular structure aluminium (wet rooms)  
20 × 20 mm only
- Closing dishes  
width 40 mm / thickness 3 mm :  
1 panel  
width 50 mm / thickness 4 mm:  
several panels
- Finishing plates 2 mm thick (optional)  
width 40 mm : 1 panel  
width 50 mm : several panels


## Frame finishes



Anodized aluminum




Black RAL 9005  
Textured



Gold RAL 1036  
Textured



White  
RAL 9010 textured




Grey RAL 9006  
Textured

*Other finishes on quotations*


# TUBULAR SYSTEM: DETAILS AND FINISHES




## Finishing dishes (optional)




Anodized aluminum




Black RAL 9005 Textured




Stainless steel Mirror polished



Brass Polished




Brushed aluminium




White RAL 9010 textured




Stainless steel Brushed



Brass Brushed



Gold RAL 1036 Textured



Grey RAL 9006 Textured

# STRAIGHT TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-A



*Straight tubular frame, finish: mirror polished stainless steel*

## Uses

- Partition wall straight / verse
- Impost
- Wall application

## Bindings

- Floor-ceiling
- Floor - wall
- Wall sconce

## Dimensions

- Square tubular structure in steel

for Dacryl® 15 mm thick:  
16 × 16 mm

for Dacryl® th. 18 and 20 mm :  
20 × 20 mm

- Square tubular structure aluminium (wet rooms)

20 × 20 mm only

- Closing dishes

width 40 mm / thickness 3 mm

- Finishing plates 2 mm thick (optional) width 40 mm

## Deliverables

Delivered pre-assembled:

- Dacryl® panel inserted in tubular frame for transport and installation
- Led lighting with welded wire outlet, in roll ready to lay and connect
- Power supply 220 V for 12v led lighting
- Optional finishing dishes delivered separately, ready to glue (glue supplied)

# STRAIGHT TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-A

## Description of deliverables


*Dacryl® panel delivered in the frame for transport and to be removed for installation of the frame.*

*Prepared led ribbon lighting with wire exit welded / delivered in rolls ready to install and to be connected*

*Optional finishing dishes straight cuts to be glued : glue supplied*

*Tubular frame to be fixed mechanically floor/wall/ceiling (fixing screws not provided)*

*Removable front plates cuts at 45° th 3 mm width 40 Mechanical mounting provided*

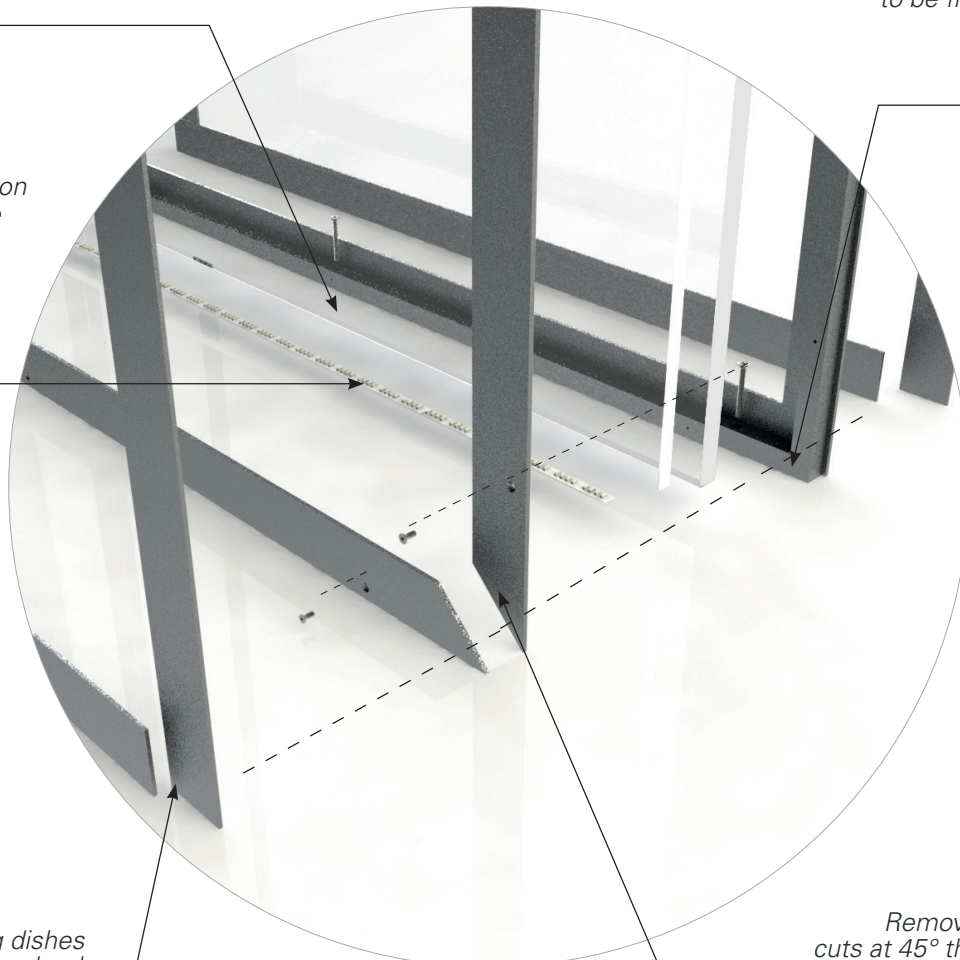

# STRAIGHT TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-A

*Tubular frame  
with dishes  
fixed backrests*

*Removable plates  
front panel th 3 of  
40 mm width  
mechanical fixing*

*wire exit  
positioning  
according to project*

1


*Optional finishing  
dishes to be glued  
(glue supplied)*

2

# STRAIGHT TUBULAR FRAME: SINGLE PANEL

Technical drawing ref. C-A

## General informations

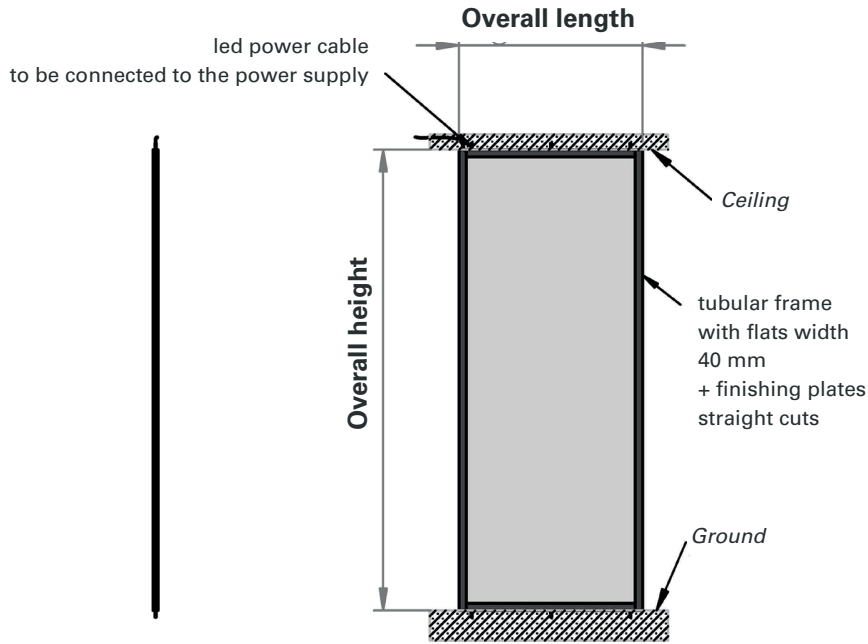

## Technical plan product description

