


Technical drawing B

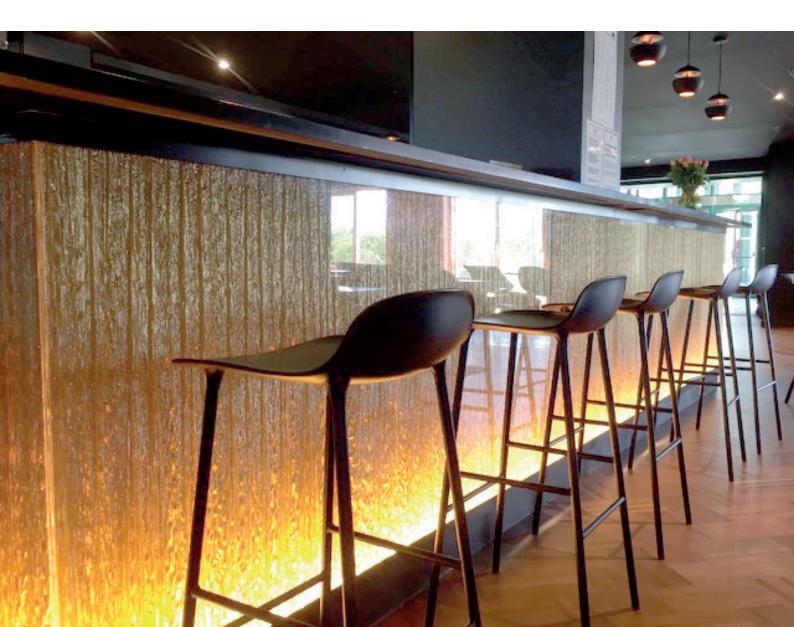

TUBULAR PROFILE: DETAILS AND FINISHES

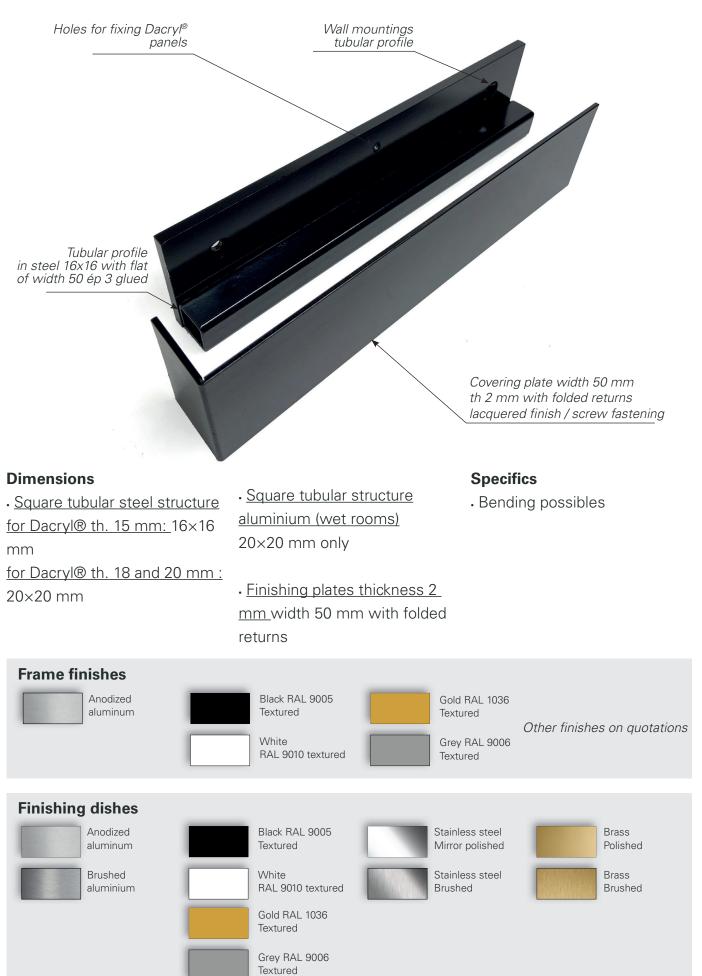

Technical drawing ref. B

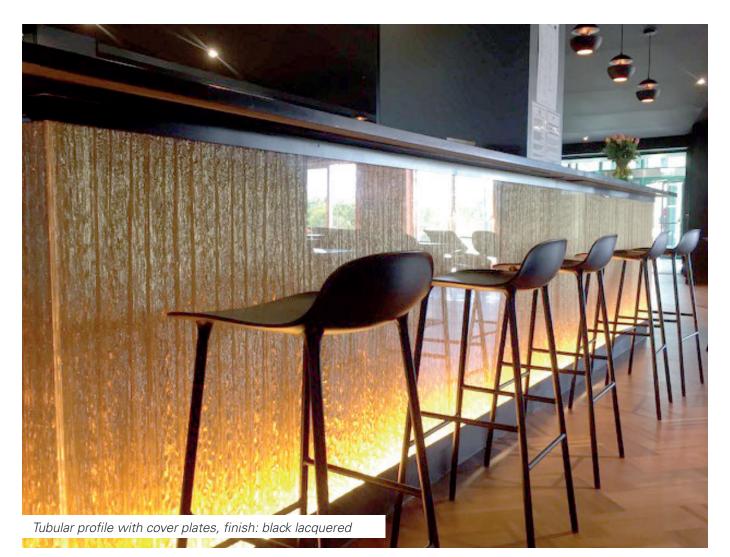

Uses

- Counter front
- Reception Bank

Bindings

- . Apply
- .Top & Bottom

Specifics

- Dacryl[®] thickness 15 mm
- Provide waterproof leds for bars
- Possible bends
- Trim plates width 50 mm


Deliverables

Delivered in kit:

- Pre-drilled Dacryl® panels thickness 15 mm
- . Pre-drilled top and bottom tubular profiles
- LED lighting with soldered wire outlet ready to install and connect
- . Power supply 220 V for 12v led lighting
- · Covers with folded returns and fixing screws


Technical drawing ref. B

Description of deliverables

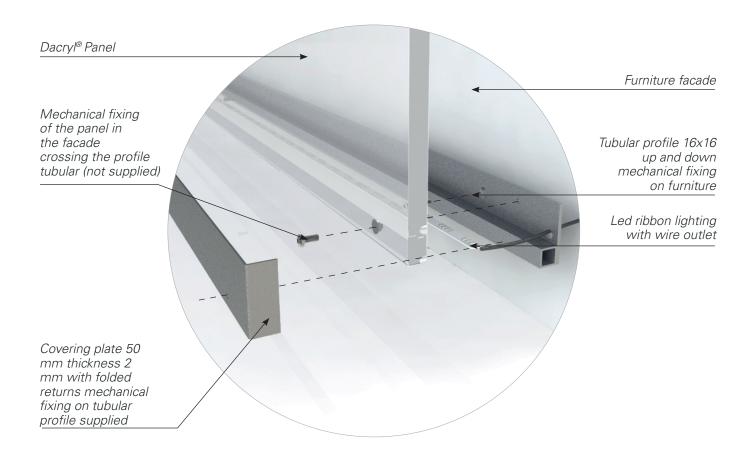

Technical drawing ref. B

General informations

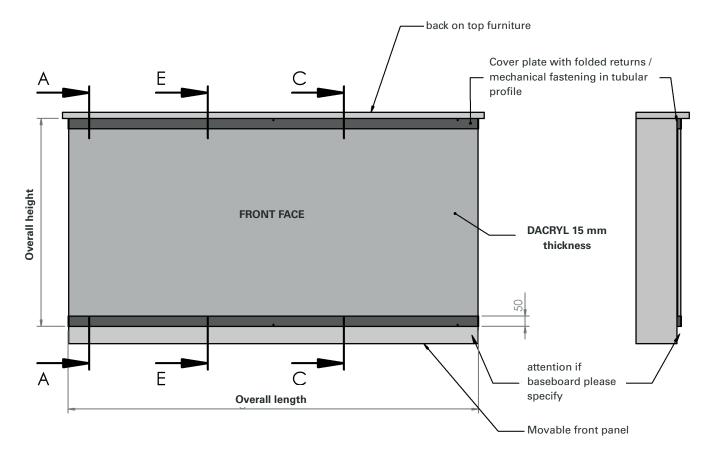


Exploded view of delivered parts to be mounted on furniture fronts



Technical drawing ref. B

Technical plan product description

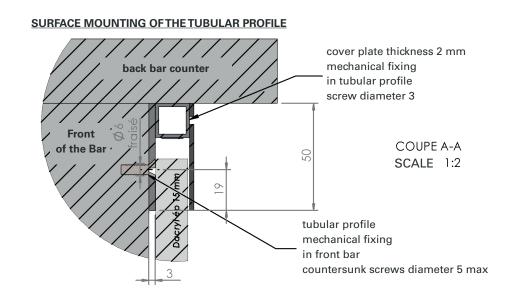

PANEL AND LEDS POSITIONING

