


WOODEN SLIDING FRAME DOOR

Technical plan CCB



SLIDING DOOR: DETAILS AND FINISHES


Opening frame

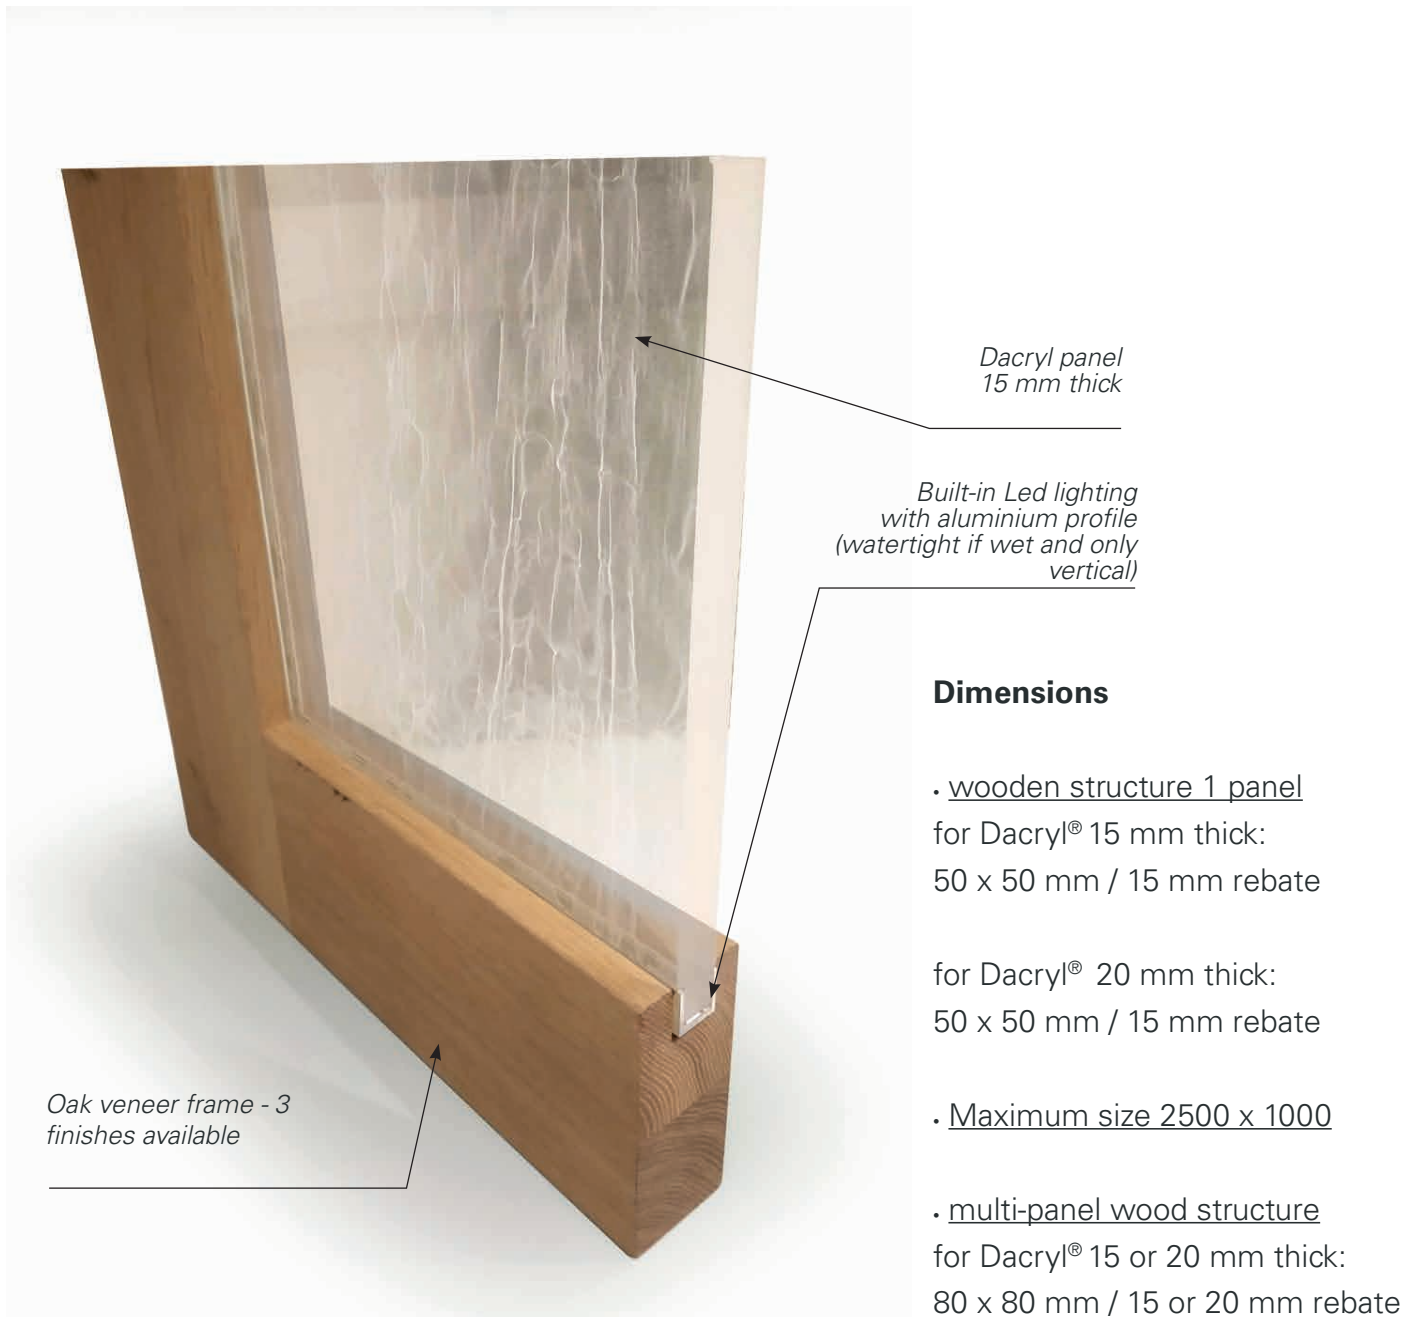

Finishes



Natural oak
(varnish)



Black oak (matt)



Oak Ice (gloss)

Other finishes available on request and on counterplate (RAL...)

WOODEN SLIDING FRAME DOOR

Technical plan ref. CCB



Wood sliding door, finish: natural oak

Uses

- . In impost
- . For 1 door
- . Rail length 3m

Bindings

- . Ceiling mounted rail or applied

Option

- . Led lighting
- . Finishing Plates
- . Dacryl® handle

Dimensions

- . Maximum weight 80 kg rail for Dacryl thickness 15 mm

- . Maximum weight 120 kg rail for Dacryl th 20 mm

- . Closing dishes
width: 40 and 50 mm
thickness 3 mm

- . Finishing dishes
width: 40 and 50 mm
thickness 2 mm

Our systems can be adapted to all other brands of sliding rail systems (Scrigno,...) excluding glass clamps.


WOODEN SLIDING FRAME DOOR

Technical plan ref. CCB

Description of deliverables

*Sliding rail to be fixed
Provide a welcome profile if laying
in a galandage.*

Casters

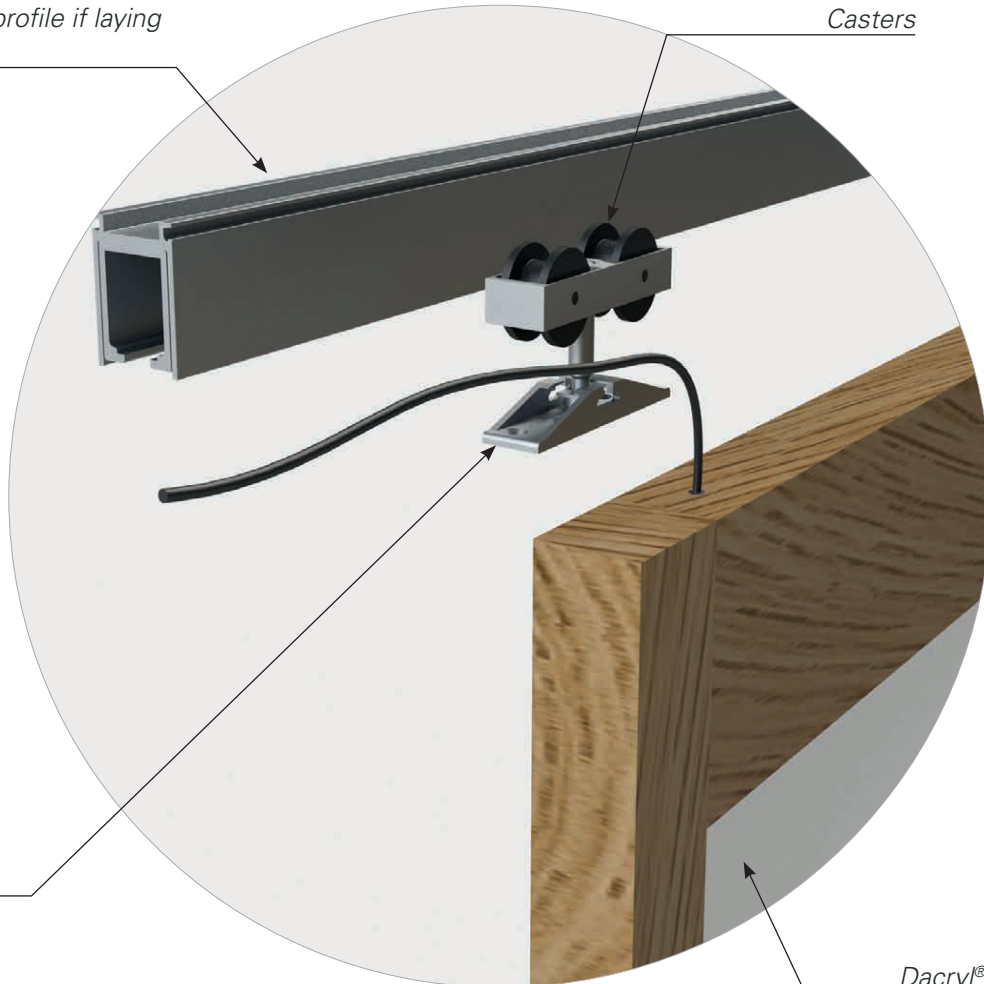


*Welded fixing paste
for inserting castors
on frame*

*Dacryl® in wooden
frame with led
lighting and thread
exit at the top*

WOODEN SLIDING FRAME DOOR


Technical plan ref. CCB

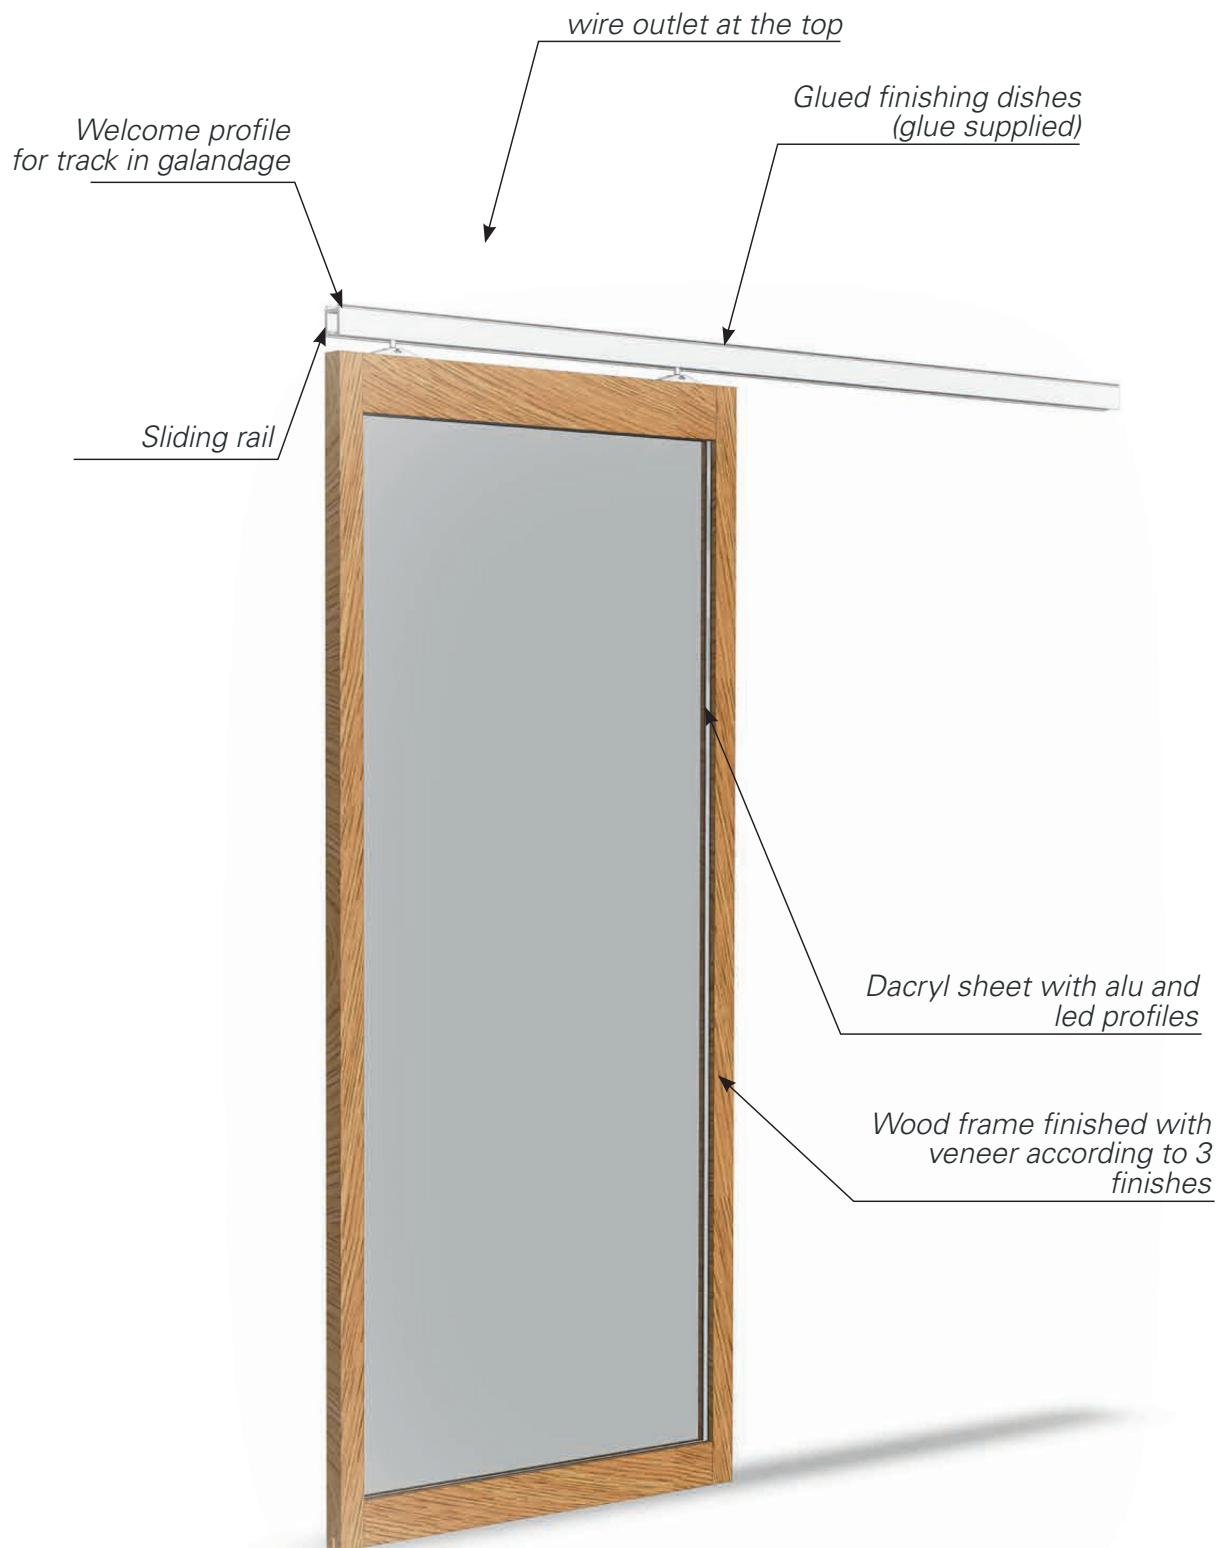


WOODEN SLIDING FRAME DOOR

Technical plan ref. CCB

General informations

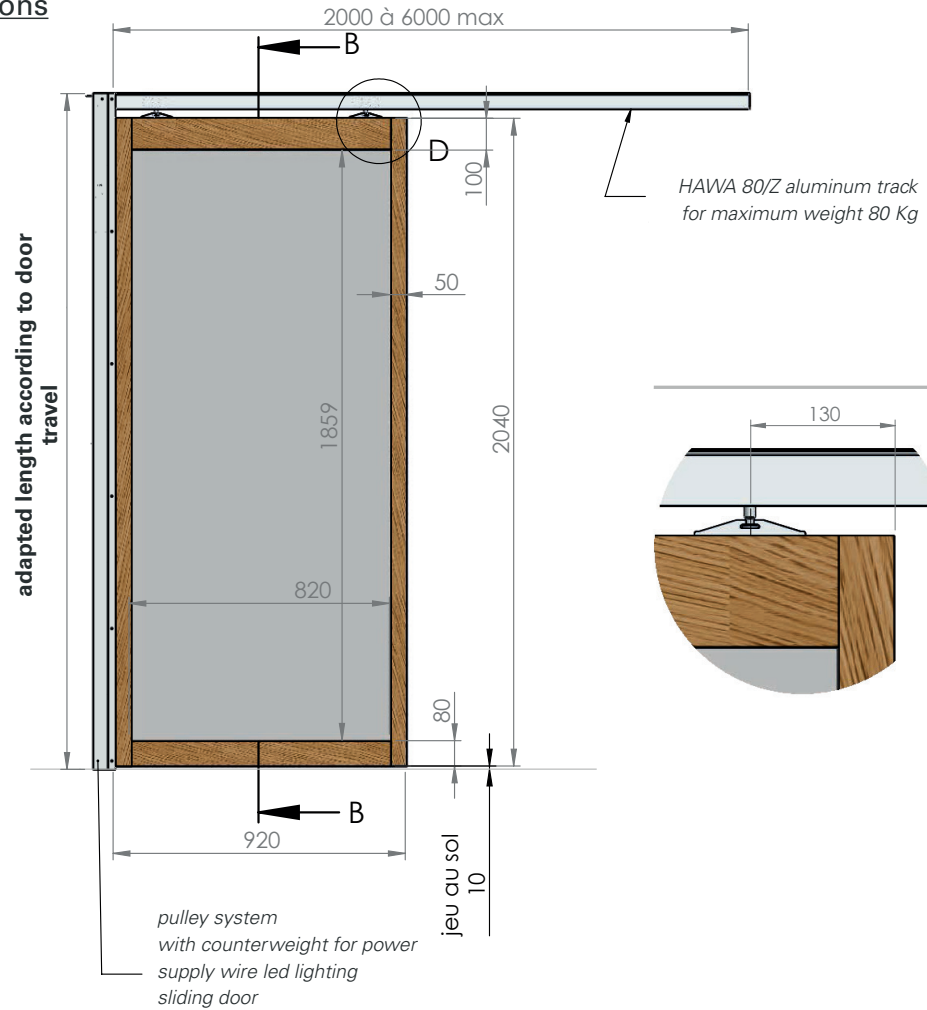

Technical plan product description

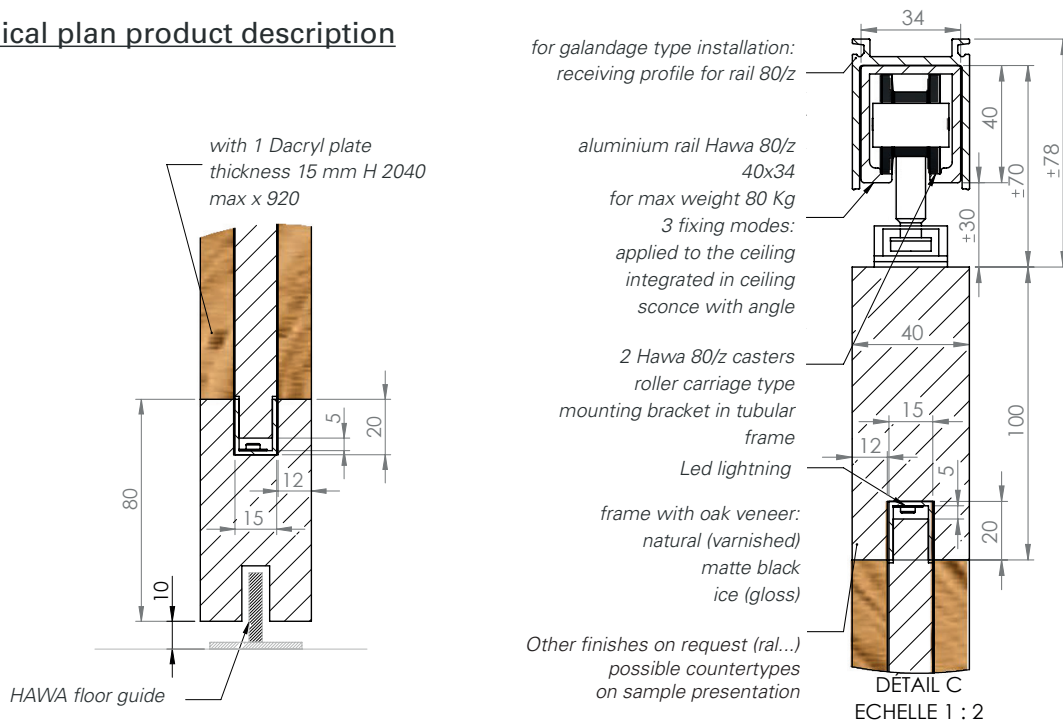

SLIDING DOOR: PULLEY AGAINST WEIGHT

Technical plan ref. CPB

